

ERA TECHNOLOGY

**Permitted Noise Above 1 GHz:  
Final Report**

M Ganley (ERA), A J Maddocks (ERA), B Randhawa (ERA),  
S Makhalfa (ERA), R Rudd (Aegis), S Kirtay (Aegis),  
G Eastwood (QinetiQ)

ERA Report 2006-0450  
ERA Project 7G0292801  
FINAL REPORT

Client : OFCOM  
Client Reference : Ahmad Atefi (Ofcom)

Checked by:



Roger Smith  
Senior Consultant

Approved by:



Dr Martin Ganley  
Head of EMC & RFI

September 2006  
Ref: MG/vs/62/02928/Rep-6007

© Copyright ERA Technology Limited 2006  
All Rights Reserved

No part of this document may be copied or otherwise reproduced without the prior written permission of ERA Technology Limited. If received electronically, recipient is permitted to make such copies as are necessary to: view the document on a computer system; comply with a reasonable corporate computer data protection and back-up policy and produce one paper copy for personal use.

## DOCUMENT CONTROL

This document may be distributed freely in whole, without alteration, subject to Copyright.

ERA Technology Ltd  
Cleeve Road  
Leatherhead  
Surrey KT22 7SA  
UK  
Tel : +44 (0) 1372 367000  
Fax: +44 (0) 1372 367099  
E-mail: [info@era.co.uk](mailto:info@era.co.uk)

Read more about ERA Technology on our Internet page at: <http://www.era.co.uk/>

## Summary

The Office for Communications (Ofcom) contracted a consortium led by ERA Technology and including Aegis Systems Ltd and QinetiQ to perform a study into Permitted Interference and EMC limits above 1 GHz. The main aims of the work were to try to identify the risk to Ofcom of the increasing use of electronic equipment and radio devices in the home, office and other environments. Ofcom want to ensure that there are sufficient standards in place to ensure that emissions from all noise sources do not degrade the quality of the spectrum.

CISPR published proposed EMC emission limits for 1 to 6 GHz during 2005. It is expected that EN 55022 will be upgraded with the latest approved amendments to CISPR 22 for emissions above 1 GHz. Normally that would be completed in about 2 years after CISPR publication. It is possible that certain electronic system manufacturers could still look to oppose the EN 55022 changes but this is more likely to result in delays in the implementation.

The sources of unwanted emissions included unintentional emissions from electronic equipment, UWB, and spurious emissions. The assessment method used laboratory measurements to characterise EMC and spurious emissions in an anechoic chamber. This input data was combined with data and for the victim radio systems and for UWB emissions and input into a Monte-Carlo simulation which allowed a statistical approach to predicting interference in a range of scenarios. The Monte-Carlo modeling method was compared to the CISPR methodology and proposed limits.

Seven radio systems were simulated using the Monte-Carlo in this study, T-DAB, GSM, FWA, FSS ES, GPS, RSA, and 802.11b. These simulations predicted that for a methodology similar to the CISPR method, assuming a single interferer at the CISPR limit but with realistic probabilities of interference being present in the receiver channel, four out of the seven radio systems did not experience any interference issues. For the remaining systems, the predicted interference was relatively significant. For T-DAB the probability of interference occurring was about 30% and for FWA this figure was about 15%. For GPS there was about a 40% probability of the interference power exceeding the acceptable level. Although considerable effort was made to ensure that the assumptions were not too worst-case, there may in practice be some further relaxation of the parameters used and this would require some additional work.

The practical experience of many countries seems to indicate that there are currently no significant problems with EMC interference above 1 GHz. However, as indicated by the measurements, actual EMC emissions at present are typically some 10 to 15 dB below the CISPR average limit. Although it is difficult to use the practical experience of the lack of instances of interference from existing equipment which operate significantly below the CISPR limit as proof that equipment operating at the CISPR limit causes no problems, it may be a good indication that there are not likely to be any significant EMC interference issues in the near future.

The Monte-Carlo modeling based on actual measured electronic equipment emission levels, instead of CISPR emission limits, predicted no interference issues from current devices. As the EMC emissions

are not expected to get significantly worse in the near future, it is likely that there will be no significant EMC interference issues, although this may be very system dependent.

Although CISPR considers interference from just a single device, it was shown that aggregate EMC emissions may need to be considered where the density of interferers increases considerably, as has been suggested for future potential home and office usage. For the scenarios considered the increase in interference levels in the receiver bandwidth varied between about 3 dB and 11 dB more than for the single interferer case.

The proposed CISPR levels appear to be set at a sensible level to protect radio receivers above 1 GHz with a practical balance with the constraints that more stringent limits would place on manufacturers. There is protection, in that, if interference levels are reported then mitigations will be sought, either by reducing the emissions from particular items of equipment or by reconsidering the CISPR limit. The Monte-Carlo modelling performed in this study predicted some possible interference to some of the radio systems when assuming equipment emissions at the CISPR level. However, it is possible that although care was taken to not over-predict the likelihood of interference, some relaxation of the modelling criteria might remove this predicted interference and this should be investigated further.

Interference from EMC emissions was compared to interference from UWB, spurious emissions and thermal noise. It was seen that spurious emission levels tended to be the highest, with thermal noise next highest, then EMC emissions and finally UWB emissions. Potential interference from spurious emissions appears limited to high powered transmitters such as broadcast transmitters and radars for example. For general communications systems, although the level of spurious emissions is high compared to other sources of unwanted emissions such as EMC and UWB, the probability of a spurious emission falling in any given band are quite low.

Including the probability of the occurrence of interference, a comparison was made between EMC, UWB and thermal noise. It could be seen that, for a 1 MHz receiver bandwidth, the probability of the aggregate interference levels from three UWB devices being higher than thermal noise was less than 0.1%. In the case of EMC emissions, this probability was up to 1%. This was based on an FWA configuration and further work is required to determine these figures for more general services.

It was determined that the definition and implementation of a Permitted Noise Metric is practical. This may not be a single absolute measure and could consist of simple graphs containing:

- the probability of any given interference power level;
- for a specified group of frequency ranges (e.g. 1 to 2 GHz, 2 to 4 GHz etc);
- for a range of specified bandwidths;
- aggregated over thermal noise, EMC emissions and UWB emissions.

Examples of a permitted noise metric are given for a range of bandwidth. This was calculated for the 3 to 4 GHz band and has a number of underlying assumptions that required further investigation and agreement.

It was seen that it would be practical to include UWB in the permitted noise metric. It is not seen as appropriate to include spurious emissions in a generic permitted noise metric as the harmonic frequencies are predictable and the potential level of interference could be significant compared to other sources of interference but with quite a low probability of occurrence. However, it may be beneficial to include specific high powered emitters such as radars.

Using this approach of characterising interference from equipment in the laboratory and then using those values as building blocks to put into a Monte-Carlo simulation is advantageous as it does not rely on the devices being present in large numbers throughout the UK. Simulations can be predictive of future situations and can allow what-if scenarios to be carried out. Using this combination of modelling and measurements can allow a large number of scenarios to be determined using practical data in a manageable amount of time and is very cost effective.

Validation measurements were carried out in the laboratory for interference to GSM phones and Wi-Fi from single and aggregate EMC emissions and UWB emissions. Interference could be caused to the GSM phones and Wi-Fi, but only under worst-case conditions where the wanted received carrier levels were low, the channel had been selected to be at the worst-case EMC emissions and the separation distances were of the order of centimetres. For aggregate effects, the measurements showed that the single worst-case interferer tended to dominate.

*This page is intentionally left blank*

## Contents

	Page No.
<b>1 Introduction</b>	<b>31</b>
1.1 Sources of Interference	32
1.2 Methodology Used in this Work for Estimating Noise Levels	35
<b>2 Standards</b>	<b>36</b>
2.1 EMC Standards for Emissions Above 1 GHz	37
2.2 Spurious Emissions Standards	41
2.3 UWB Standards	42
2.3.1 FCC and NTIA Recommendations	42
2.3.2 ECC Recommendation	43
<b>3 Review of Existing Research Studies for Noise Above 1 GHz</b>	<b>44</b>
<b>4 Measurements</b>	<b>46</b>
4.1 Products Tested	48
4.2 The Fully Anechoic Room (FAR) Measurement Configuration	49
4.3 The Reverberation Chamber Measurement Configuration	50
4.4 Fully Anechoic Room (FAR) Test Results	51
4.4.1 Field Strength Polar Distribution	54
4.5 Reverberation Test Results Assessment	54
4.6 Comparison of FAR and Reverberation Measurements	55
4.7 Extraction of Measurement Data for Input to the Modelling	56
4.8 Spurious Emission Measurements in FAR	62

<b>5</b>	<b>Monte-Carlo Modelling</b>	<b>63</b>
5.1	Radio Services Considered	63
5.2	Interferer Characteristics	63
5.2.1	EMC Model	64
5.2.2	Man-Made Noise	64
5.2.3	UWB Model	65
5.2.4	Spurious Emissions Model	65
5.3	Scenarios	65
5.3.1	Comparison of CISPR Model with Monte-Carlo Modelling used for this Study	66
5.4	EMC Emission Modelling Results	69
5.5	Comparison of EMC interference to Other Noise Sources	75
5.6	Conclusions of Modelling	79
<b>6</b>	<b>Validation Measurements</b>	<b>80</b>
6.1	GSM Validation Results	81
6.2	Interference results for WLAN	86
<b>7</b>	<b>Analysis of Results</b>	<b>89</b>
7.1	Are future EMC emissions are a threat to radio services?	90
7.1.1	Current and future EMC levels from single items of equipment	90
7.1.2	Aggregate EMC effects	90
7.1.3	CISPR Methodology for Derivation of the New EMC Limits	91
7.1.4	Should Ofcom Support the Proposed CISPR limits?	92
7.1.5	The Way Forward for the EMC Standards Process	92
7.2	Are Spurious Emissions a Threat to Radio Services	92

7.3	How do the Different Noise Sources Compare?	93
7.4	How Should a Permitted Noise Metric be Defined?	93
7.5	Interference Monitoring	96
<b>8</b>	<b>Conclusions</b>	<b>97</b>
<b>9</b>	<b>Recommendations for further work</b>	<b>101</b>
<b>10</b>	<b>References</b>	<b>101</b>
<b>A</b>	<b>Detailed Measurements Results</b>	<b>104</b>
A.1	Introduction	104
	A.1.1 Background	104
	A.1.2 General Approach to measurement methods	105
	A.1.3 IEC standards	107
	A.1.4 Other test methods	108
A.2	Measurements	108
	A.2.1 Anechoic chamber measurements	108
	A.2.2 Reverberation chamber measurements	108
A.3	Products Tested	109
	A.3.1 List of Products examined	109
A.4	Anechoic Chamber Measurements	110
	A.4.1 Facility Calibration	110
	A.4.2 Fully Anechoic Measurements	111
A.5	Reverberation Chamber Measurements	117
	A.5.1 Radiated Emissions Set-Up within Reverberation Chamber	117
	A.5.2 Summary of Tests	119

A.5.3	Configurations and Mode of Operation in Reverberation Chamber	120
A.5.4	Measurement data	122
A.6	FAR Test Results Assessment	122
A.6.1	Near Field – Far Field Assessment	122
A.6.2	Comparison with CISPR Limits	123
A.6.3	Field Strength Polar Distribution	133
A.7	Reverberation Test Results Assessment	142
A.7.1	Introduction	142
A.7.2	Results	142
A.7.3	Comparison of Mode-stirred and Mode-tuned	147
A.7.4	DECT Phone and Multimedia System	149
A.8	Measurement Times	150
A.8.1	FAR Measurement Time for the Basic CISPR Test	150
A.8.2	Time for Additional Testing	150
A.8.3	Reducing Measurement Times	151
A.9	Comparison of FAR and Reverberation Measurements	151
A.10	Impact on Industry	153
A.10.1	Product Manufacturers	153
A.10.2	Radio service operators	154
A.11	Summary of Measurements	155
A.12	FAR Calibration Data	156
A.12.1	A.2 Calibration results	157
A.13	Reverberation Chamber Emissions Test Methods	162
A.13.1	Anechoic chamber versus reverberation chambers techniques	163

A.13.2	Reverberation Chamber radiated emissions	165
A.13.3	Reverberation Chamber measurement parameters	168
A.13.4	Radiated emissions set-up within reverberation chamber	171
A.14	Fully Anechoic Room Test Results	173
A.14.1	DVD Player – Goodmans X-Pro and LCD TV – Digix LN460	173
A.14.2	DECT Phone – Twin Set Digital Cordless Phone	186
A.14.3	Desktop PC – Packard Bell I Media Pentium 4	198
A.14.4	Laptop PC – Compaq nx9010	211
A.14.5	Multimedia System - Philips	224
A.14.6	X-Box 360 - Core system	235
A.15	References	249
<b>B</b>	<b>Radio Services</b>	<b>251</b>
B.1	The Radio Spectrum	251
B.2	Potential Radio Services to be Considered	252
B.3	List of Services Used for the Monte-Carlo Modelling	256
<b>C</b>	<b>Monte-Carlo Modelling</b>	<b>257</b>
C.1	Introduction to EMC Modelling	257
C.2	Interferer Characteristics	257
C.2.1	Measurement Results	257
C.2.2	Probability of EMC Emission Falling into Victim Receive Band	262
C.3	EMC Modelling	264
C.3.1	Interference into Terrestrial Digital Audio Broadcasting Receiver (T-DAB Rx)	264

C.3.2	Interference into Global System for Mobile Communications Receiver (GSM Rx)	277
C.3.3	Interference into Fixed Satellite Service Earth Station Receiver (FSS ES Rx)	288
C.3.4	Interference into Global Positioning System Receiver (GPS Rx)	292
C.3.5	Interference into Fixed Wireless Access System Receiver (FWA Rx)	296
C.3.6	Interference into Radio Astronomy Receiver (RAS Rx)	308
C.3.7	Interference into 802.11 b Wireless Local Area Network Receiver (802.11b Rx)	310
C.4	Summary Of EMC Modelling Results	316
C.5	Conclusions of EMC Modelling	322
C.6	Comparing EMC to Other Noise Sources	324
C.6.1	Man-made Noise	324
C.6.2	UWB Emission Limits	326
C.6.3	Spurious Emissions	327
C.6.4	Modelling	327
C.6.5	Conclusions of Comparing EMC to Other Noise Sources	329
C.7	Modelling Single Interferer Cases	329
C.7.1	T-DAB Scenario	330
C.7.2	FWA Scenario	331
C.7.3	FSS ES Scenario	332
C.7.4	GPS Scenario	333
C.7.5	Variation of Noise, EMC, SE and UWB Interference with Rx Bandwidth	334

## Tables List

	Page No.
Table 1: CISPR 22 amendment, proposed limits above 1 GHz.....	37
Table 2: FCC limits for digital devices.....	39
Table 3: Comparison of limits at 3 m.....	39
Table 4: Spurious emission limits for T-DAB transmitter.....	41
Table 5: Requirements for DCS BSS transmitter spurious emissions in receiver bands.....	41
Table 6: MS allocated channel spurious emission power levels.....	42
Table 7: RLAN transmitter limits for narrow band spurious emissions.....	42
Table 8: RLAN transmitter limits for wide band spurious emissions.....	42
Table 9: Measured Emission Characteristics.....	60
Table 10: Measured Emission Characteristics (continued).....	61
Table 11: DECT spurious emission levels.....	62
Table 12: Summary of EMC Monte-Carlo modelling results.....	71
Table 13: Comparison of receive quality (RxQ) and Bit Error Rate (BERR) for GSM.....	82
Table 14 Overview of radio services above 1 GHz.....	104
Table 15 CISPR I emission limits for Information Technology Equipment.....	106
Table 16 Comparison of CISPR and FCC emission limits.....	107
Table 17: Summary of measurements for all products.....	113
Table 18: Proposed CISPR limits above 1 GHz.....	115
Table 19 Probability factors.....	115
Table 20 Summary of equipment tested (stirred and tuned mode).....	119
Table 21: Mode stirred measurements.....	121
Table 22: Mode tuned measurements.....	121

Table 23 Measurements on Laptop at 2.67 GHz, X axis .....	126
Table 24 Measurements on XBox at 1.25 GHz, X axis .....	129
Table 25 Measurements on DECT at 5.844 GHz, X axis .....	132
Table 26 Measurements on DVD at 1.25 GHz, X axis .....	132
Table 27 Measurements on Multi-media at 1.446 GHz, X axis .....	133
Table 28 Measurements on Desktop at 1.724 GHz, X axis .....	133
Table 29: Reverberation chamber test results .....	142
Table 30: Testing time for basic CISPR test .....	150
Table 31: Testing time – additional tests .....	150
Table 32 : Current radiated emissions standards above 1GHz .....	165
Table 33: DVD/TV Summary of Measurements .....	173
Table 34: DVD/TV Summary of Polar Measurements .....	173
Table 35: Location of test results – DVD/TV .....	174
Table 36: Location of polar distribution results – DVD/TV .....	182
Table 37: DECT Phone Summary of Measurements .....	186
Table 38: DECT Phone Summary of Polar Measurements .....	186
Table 39: Location of test results – DECT phone .....	187
Table 40: Location of polar distribution results – DECT phone .....	195
Table 41: Desktop PC Summary of Measurements .....	198
Table 42: Desktop PC Summary of Polar Measurements .....	198
Table 43: Location of test results – Desktop PC .....	199
Table 44: Location of polar distribution results – Desktop PC .....	207
Table 45: Laptop Summary of Measurements .....	211
Table 46: Laptop Summary of Polar Measurements .....	211

Table 47: Location of test results – Laptop PC.....	212
Table 48: Location of polar distribution results – Laptop PC.....	220
Table 49: Multimedia System Summary of Measurements.....	224
Table 50: Multimedia System Summary of Polar Measurements .....	224
Table 51: Location of test results – Multimedia system .....	225
Table 52: Location of polar distribution results – multimedia system.....	233
Table 53: X Box Summary of Measurements.....	236
Table 54: X Box Summary of Polar Measurements .....	236
Table 55: Location of test results - Xbox .....	237
Table 56: Location of polar distribution results - Xbox .....	245
Table 57: Frequency allocation of radio services (% usage in each sector). .....	252
Table 58: Radio services to be considered.....	252
Table 59: Measured Emission Characteristics .....	261
Table 60: Measured Emission Characteristics(continued).....	261
Table 61: T-DAB Link Parameters.....	265
Table 62: Probability of Interference into T-DAB Receiver .....	266
Table 63: GSM Link Parameters .....	278
Table 64: Probability of Interference into GSM Receiver .....	279
Table 65: FSS ES Rx Parameters.....	288
Table 66: Probability of Interference into FSS ES Receiver .....	289
Table 67: GPS Rx Parameters.....	292
Table 68: Probability of Interference into FSS ES Receiver .....	293
Table 69: FWA Link Parameters .....	297
Table 70: Probability of Interference into FWA Receiver.....	298

Table 71: RAS Rx Parameters .....	308
Table 72: 802.11b Link Parameters .....	310
Table 73: Probability of Interference into 802.11b Receiver.....	311
Table 74: Summary of T-DAB Interference Modelling Results.....	316
Table 75: Summary of GSM Interference Modelling Results .....	317
Table 76: Summary of FSS ES Interference Modelling Results.....	318
Table 77: Summary of GPS Interference Modelling Results.....	319
Table 78: Summary of FWA Interference Modelling Results .....	320
Table 79: Summary of RSA Interference Modelling Results .....	321
Table 80: Summary of 802.11b Interference Modelling Results.....	322
Table 81: Constants.....	325
Table 82: Maximum Mean EIRP Density Limits .....	326
Table 83: Emission Characteristics.....	327
Table 84: FWA Link Parameters .....	328

## Figures List

	Page No.
Figure 1: Noise source contributors.....	33
Figure 2: Man-made noise levels in current version of P.372 .....	34
Figure 3: Data on man-made noise in proposed revision of P.372 (ITU-R Document 3/30). .....	35
Figure 4: Overview of methodology combining measurement of electronic and radio equipment with Monte-Carlo modelling.....	36
Figure 5: Typical EUT measurement setup .....	38
Figure 6: FCC and draft ECC UWB mean EIRP limits compared with CISPR average emission limits in a 1 MHz band.....	44

Figure 7: The Hemispherical Measurement Range.....	45
Figure 8: EMC emissions a) at 1 GHz; (b) at 3 GHz; (c) at 10 GHz).....	45
Figure 9: The fully anechoic room.....	47
Figure 10: The stirred-mode chamber.....	48
Figure 11 CISPR validated test volume measurement set-up.....	49
Figure 12 EUT configurations for the X, Y and Z axis measurements.....	50
Figure 13: Emissions from laptop with 1 MHz bandwidth and peak detector.....	52
Figure 14 Emissions from laptop with 1 MHz bandwidth and average detector.....	52
Figure 15: Emissions from desktop PC with 1 MHz bandwidth and peak detector. ....	53
Figure 16: from X-Box with 1 MHz bandwidth and peak detector. ....	53
Figure 17: Polar distribution of the laptop emissions in the x-axis: (a) at 1.464 GHz and (b) at 2.653 GHz.....	54
Figure 18: Laptop – Mode Stirred.....	55
Figure 19: Desktop PC reverberation chamber radiated emission results relative to FAR results .....	55
Figure 20: DVD/TV reverberation chamber radiated emission results relative to FAR results .....	56
Figure 21 EMC Measurements from a Desktop PC.....	57
Figure 22: Automatic extractions of narrowband and broadband data, DVD+TV, 1 to 2 GHz .....	58
Figure 23: Extracted narrowband statistics (% of sampled data plus number of occurrences).....	59
Figure 24 : T-DAB Home Scenario Results .....	69
Figure 25: Comparison between single device EMC interference and aggregate EMC interference from 5 devices for the T-DAB scenario.....	72
Figure 26: Comparison between single device EMC interference and aggregate EMC interference from 5 devices for the FWA scenario. ....	72
Figure 27: Reduction in interference due to a reduction in the number of interferers for FSS ES. ....	74
Figure 28: Reduction in interference due to a reduction in the number of interferers for GPS. ....	74

Figure 29: Comparison of CISPR EMC, FCC and draft ECC UWB, and spurious emissions limits... 76

Figure 30: Relative interferer levels at receiver versus bandwidth, with no probability of occurrence taken into account. .... 77

Figure 31: Comparison of EMC and UWB interference in a 1 MHz bandwidth..... 78

Figure 32: Test set-up for laptop/desktop vs. GSM ..... 81

Figure 33: Photograph of setup for multiple equipment EMC interference to GSM..... 82

Figure 34: Electric field strength of the received GSM signal vs. receive quality as a function of laptop separation distance for a Nokia handset..... 83

Figure 35: Electric field strength of the received GSM signal vs. receive quality as a function of desktop separation distance for a Nokia handset ..... 84

Figure 36: Electric field strength of received GSM signal vs. receive quality for accumulative interference (channel 786) ..... 84

Figure 37: Electric field strength of received GSM signal for AWGN, UWB and EMC interference measured at 1 m respectively vs. receive quality for a GSM phone ..... 86

Figure 38: Measurement setup for EMC interference to WLAN ..... 87

Figure 39: Effect of throughput due to EMC emissions from desktop PC interfering with WLAN .... 87

Figure 40: WLAN throughput with a desktop PC at a separation distance of 100 cm ..... 88

Figure 41: WLAN throughput with a desktop PC at a separation distance of 0 cm ..... 88

Figure 42: Interference to WLAN from AWGN and OFDM at 1m ..... 89

Figure 43: Summary of sources of interference..... 94

Figure 44: Example of potential Permitted Noise Metric measure..... 96

Figure 45: Fully anechoic room calibration set-up ..... 110

Figure 46 CISPR validated test volume measurement set-up..... 111

Figure 47 Measuring equipment set-up ..... 112

Figure 48: Fully anechoic room measuring arrangement ..... 113

Figure 49 EUT configurations for the X, Y and Z axis measurements..... 114

Figure 50 Effective planes considered .....	114
Figure 51 LCD Television and DVD player set-up within the Reverberation Chamber for radiated emissions measurements .....	118
Figure 52: X-Box 360 E-Field vs distance.....	123
Figure 53: Laptop emission profile – Vertical – Peak .....	124
Figure 54: Laptop emission profile – Vertical – Average.....	125
Figure 55 Resolution bandwidth, detector and antenna polarisation dependence .....	126
Figure 56 X-Box emission profile – Vertical – Peak.....	127
Figure 57: XBox emission profile – Vertical – Average .....	128
Figure 58 DECT phone emission profile – Vertical – Peak.....	130
Figure 59: DECT phone emission profile – Vertical – Average.....	131
Figure 60: Field strength distribution – Laptop 1.464 GHz.....	134
Figure 61: Field strength distribution – Laptop 2.653 GHz.....	134
Figure 62 Field strength distribution – XBox 1.393 GHz.....	135
Figure 63: Field strength distribution – XBox 2.690 GHz.....	136
Figure 64: Field strength distribution – DECT 3.769 GHz.....	137
Figure 65: Field strength distribution – DECT 5.675 GHz.....	137
Figure 66: Polar distribution – DVD/TV 1.350 GHz.....	138
Figure 67: Polar distribution – DVD/TV 2.122 GHz.....	138
Figure 68: Field strength distribution – Multimedia system 1.28 GHz .....	139
Figure 69: Field strength distribution – Multimedia system 1.439 GHz .....	140
Figure 70: Field strength distribution – Desktop PC 1.196 GHz.....	141
Figure 71: Field strength distribution – Desktop PC 1.725 GHz.....	141
Figure 72: Reverberation Chamber Noise Floor.....	143

Figure 73: Laptop – Mode Stirred.....	144
Figure 74: XBox radiated emissions.....	145
Figure 75: TV/DVD Mode Stirred.....	146
Figure 76: Desktop – Mode Stirred.....	147
Figure 77: Laptop – mode stirred vs mode tuned .....	148
Figure 78: XBox 360 – mode stirred vs mode tuned .....	149
Figure 79: Desktop PC reverberation chamber radiated emission results relative to FAR results .....	152
Figure 80 DVD/TV reverberation chamber radiated emission results relative to FAR results .....	153
Figure 81: The seven transmitter locations of the calibration.....	156
Figure 82: Calibrations 1-3 GHz - Horizontal .....	158
Figure 83: Calibrations 1-3 GHz – Horizontal - VSWR.....	158
Figure 84: Calibration 3-6 GHz – Horizontal .....	159
Figure 85: Calibration 3-6 GHz – Horizontal - VSWR .....	159
Figure 86: Calibration 1-3 GHz - Vertical.....	160
Figure 87: Calibration 1-3 GHz – Vertical - VSWR.....	160
Figure 88: Calibration 3-6 GHz - Vertical.....	161
Figure 89: Calibration 3-6 GHz – Vertical - VSWR.....	161
Figure 90: Typical reverberation chamber measurement set-up.....	169
Figure 91: Typical empty chamber insertion loss for the 7x5x3m reverberation chamber .....	170
Figure 92 : Computer server set-up within reverberation chamber for radiated emissions .....	172
Figure 93: DVD /TV – 1 MHz – Vertical – Peak – X axis.....	174
Figure 94: DVD /TV – 1 MHz – Vertical – Peak – Y axis.....	175
Figure 95: DVD/TV – 1 MHz – Vertical – Peak – Z axis .....	175
Figure 96: DVD/TV – 1 MHz – Vertical – Average – X axis .....	176

Figure 97: DVD/TV – 300k – Vertical – Peak – X axis ..... 176

Figure 98: DVD/TV – 300 kHz – Vertical – Average - X axis ..... 177

Figure 99: DVD/TV – 100 kHz – Vertical – Peak - X axis ..... 177

Figure 100: DVD/TV – 100 kHz – Vertical – Average - X axis ..... 178

Figure 101: DVD/TV – 1 MHz – Horizontal – Peak – X axis..... 178

Figure 102: DVD/TV – 1 MHz – Horizontal – Average – X axis ..... 179

Figure 103: DVD/TV – 300 kHz – Horizontal – Peak – X axis ..... 179

Figure 104: DVD/TV – 300 kHz – Horizontal – Average – X axis..... 180

Figure 105: DVD/TV – 100 kHz – Horizontal – Peak – X axis ..... 181

Figure 106: DVD/TV – 100 kHz – Horizontal – Average – X axis..... 181

Figure 107: DVD/TV Polar Graphs 1.032 GHz ..... 183

Figure 108: DVD/TV Polar Graphs 1.035 GHz ..... 184

Figure 109; DVD/TV Polar Graphs 2.122GHz ..... 185

Figure 110: DECT – 1 MHz – Vertical – Peak – X axis..... 188

Figure 111: DECT – 1 MHz – Vertical – Peak – Y axis..... 188

Figure 112: DECT – 1 MHz – Vertical – Peak – Z axis ..... 189

Figure 113: DECT – 1 MHz – Vertical – Average – X axis..... 189

Figure 114: DECT- 300 kHz – Vertical – Peak – X axis..... 190

Figure 115: DECT – 300 kHz – Vertical – Average – X axis ..... 190

Figure 116: DECT – 100 kHz – Vertical –Peak – X axis ..... 191

Figure 117: DECT – 100k– Vertical – Average – X axis ..... 191

Figure 118: DECT – 1 MHz – Horizontal – Peak – X axis ..... 192

Figure 119: DECT – 1 MHz – Horizontal – Average – X axis..... 192

Figure 120: DECT – 300 kHz – Horizontal – Peak – X axis..... 193

Figure 121: DECT – 300 kHz – Horizontal – Average – X axis ..... 193

Figure 122: DECT – 100 kHz – Horizontal – Peak – X axis ..... 194

Figure 123: DECT – 100 kHz – Horizontal – Average – X axis ..... 194

Figure 124: DECT Polar Graphs 3.769 GHz ..... 196

Figure 125: DECT Polar Graphs 5.675 GHz ..... 197

Figure 126: Desktop – 1 MHz – Vertical – Peak – X axis ..... 200

Figure 127: Desktop – 1 MHz – Vertical – Peak – Y axis ..... 200

Figure 128: Desktop – 1 MHz – Vertical – Peak – Z axis ..... 201

Figure 129: Desktop – 1 MHz – vertical – Average – X axis ..... 201

Figure 130: Desktop – 300 kHz – Vertical – Peak – X axis ..... 202

Figure 131: Desktop – 300 kHz – Vertical – Average – X axis ..... 202

Figure 132: Desktop – 100 kHz – Vertical – Peak – X axis ..... 203

Figure 133: Desktop – 1 MHz – Vertical – Average – X axis ..... 203

Figure 134: Desktop – 1 MHz – Horizontal – Peak – X axis ..... 204

Figure 135: Desktop – 1 MHz – horizontal – Average- X axis ..... 204

Figure 136: Desktop – 300 kHz – Horizontal – Peak – X axis ..... 205

Figure 137: Desktop – 300 kHz – Horizontal – Average – X axis ..... 205

Figure 138: Desktop – 100 kHz – Horizontal – Peak – X axis ..... 206

Figure 139: Desktop – 100 kHz – Horizontal – Average – X axis ..... 206

Figure 140: Desktop Polar Graphs 1.196 GHz ..... 208

Figure 141: Desktop Polar Graphs 1.396 GHz ..... 209

Figure 142: Desktop Polar Graphs 1.725 GHz ..... 210

Figure 143: Laptop – 1 MHz – Vertical – Peak – X Axis ..... 213

Figure 144: Laptop – 1 MHz – Vertical – Peak – Y axis ..... 213

Figure 145: Laptop – 1 MHz – Vertical – Peak – Z axis ..... 214

Figure 146: Laptop – 1 MHz – Vertical – Average – X axis ..... 214

Figure 147: Laptop – 300 kHz – Vertical – Peak – X axis ..... 215

Figure 148: Laptop – 300 kHz – Vertical – Average – X axis ..... 215

Figure 149: Laptop – 100 kHz – Vertical – Peak – X axis ..... 216

Figure 150: Laptop – 100 kHz – Vertical – Average – X axis ..... 216

Figure 151: Laptop – 1 MHz – Horizontal – Peak – X axis ..... 217

Figure 152: Laptop – 1 MHz – Horizontal – Average – X axis ..... 217

Figure 153: Laptop – 300 kHz – Horizontal – Peak – X axis ..... 218

Figure 154: Laptop – 300 kHz – Horizontal – Average – X axis ..... 218

Figure 155: Laptop – 100 kHz – Horizontal – Peak – X axis ..... 219

Figure 156: Laptop – 100 kHz – Horizontal – Average ..... 219

Figure 157: Laptop Polar Graphs 1.328 GHz ..... 221

Figure 158: Laptop Polar Graphs 1.464 GHz ..... 222

Figure 159: Laptop Polar Graphs 2.653 GHz ..... 223

Figure 160: Media – 1 MHz – Vertical – Peak – X axis ..... 226

Figure 161: Media – 1 MHz – Vertical – Peak – Y axis ..... 226

Figure 162: Media – 1 MHz – Vertical – Peak – Z axis ..... 227

Figure 163: Media – 1 MHz – vertical – Average – X axis ..... 227

Figure 164: Media – 300 kHz – Vertical – Peak – X axis ..... 228

Figure 165: Media – 300 kHz – Vertical – Average – X axis ..... 228

Figure 166: Media – 100 kHz – Vertical – Peak – X axis ..... 229

Figure 167: Media – 100 kHz – Vertical – Average – X axis ..... 229

Figure 168: Media – 1 MHz – Horizontal – Peak – X axis ..... 230

Figure 169: Media – 1 MHz – Horizontal – Average – X axis..... 230

Figure 170: Media – 300 kHz – Horizontal - Peak – A axis..... 231

Figure 171: Media – 300 kHz – Horizontal – Average – X axis ..... 231

Figure 172: Media – 100 kHz – Horizontal – Peak – X axis ..... 232

Figure 173: Media – 100 kHz – Horizontal – Average – X axis ..... 232

Figure 174: Media Polar Graphs 1.28 GHz ..... 234

Figure 175: Media Polar Graphs 1.43 GHz ..... 235

Figure 176: X Box – 1 MHz – Vertical – Peak – X axis ..... 238

Figure 177: X Box – 1 MHz – Vertical – Peak - Y axis ..... 238

Figure 178: X Box – 1 MHz – Vertical – Peak – Z axis..... 239

Figure 179: X Box – 1 MHz – Vertical – Average – X axis..... 239

Figure 180: X Box – 300 kHz – Vertical – Peak – X axis..... 240

Figure 181: X Box – 300 kHz – Vertical – Average – X axis ..... 240

Figure 182: X Box – 100 kHz – Vertical – Peak – X axis..... 241

Figure 183: X Box – 100 kHz – Vertical – Average – X axis ..... 241

Figure 184: X Box – 1 MHz – Horizontal – Peak – X axis ..... 242

Figure 185: X Box – 1 MHz – Horizontal – Average – X axis ..... 242

Figure 186: X Box – 300 kHz – Horizontal – Peak – X axis..... 243

Figure 187: X Box – 300 kHz – Horizontal – Average – X axis ..... 243

Figure 188: X Box – 100 kHz – Horizontal – Peak – X axis..... 244

Figure 189: X Box – 100 kHz – Horizontal – Average – X axis ..... 244

Figure 190: X Box polar Graphs 1.393 GHz ..... 246

Figure 191: X Box Polar Graphs 2.690 GHz ..... 247

Figure 192: X Box Polar Graphs 2.990 GHz ..... 248

Figure 193: Current distribution of the radio spectrum (weighted).....	251
Figure 194: EMC Measurements from a Desktop PC .....	258
Figure 195: Average EMC Levels from a Desktop PC in 1 – 3 GHz.....	258
Figure 196: Variation of Field Strength from a Desktop PC with Orientation .....	259
Figure 197: C/N Cdf (T-DAB Rx, Home Environment) .....	267
Figure 198: C/N+I Cdf (T-DAB Rx, Narrowband Interference in Home Environment).....	267
Figure 199: C/N+I Cdf (T-DAB Rx, Reduced Coverage, Narrowband Interference in Home Environment) .....	268
Figure 200: C/N Cdf (T-DAB Rx, Office Environment).....	269
Figure 201: C/N+I Cdf (T-DAB Rx, Narrowband Interference in Office Environment).....	269
Figure 202: C/N Cdf (T-DAB Rx, Home Environment) .....	270
Figure 203: C/N+I Cdf (T-DAB Rx, Wideband Interference in Home Environment).....	270
Figure 204: C/N Cdf (T-DAB Rx, Office Environment).....	271
Figure 205: C/N+I Cdf (T-DAB Rx, Wideband Interference in Office Environment).....	272
Figure 206: C/N+I Cdf (T-DAB Rx, CISPR Interference in Home Environment) .....	273
Figure 207: C/N+I Cdf (T-DAB Rx, CISPR Interference in Office Environment).....	273
Figure 208: C/N+I Cdf (T-DAB Rx, Reduced Coverage, CISPR Interference in Home Environment) .....	274
Figure 209: C/N+I Cdf (T-DAB Rx, Reduced Coverage, CISPR Interference in Office Environment) .....	274
Figure 210: C/N+I Cdf (T-DAB Rx, CISPR Narrowband Interference in Home Environment) .....	275
Figure 211: C/N+I Cdf (T-DAB Rx, CISPR Wideband Interference in Home Environment).....	275
Figure 212: C/N+I Cdf (T-DAB Rx, CISPR Narrowband Interference in Office Environment).....	276
Figure 213: C/N+I Cdf (T-DAB Rx, CISPR Wideband Interference in Office Environment).....	276
Figure 214: C/N Cdf (GSM Rx, Home Environment).....	279

Figure 215: C/N+I Cdf (GSM Rx, Narrowband Interference in Home Environment)..... 280

Figure 216: C/N Cdf (GSM Rx, Office Environment) ..... 280

Figure 217: C/N+I Cdf (GSM Rx, Narrowband Interference in Office Environment)..... 281

Figure 218: C/N Cdf (GSM Rx, Home Environment)..... 281

Figure 219: C/N+I Cdf (GSM Rx, Wideband Interference in Home Environment)..... 282

Figure 220: C/N Cdf (GSM Rx, Office Environment) ..... 282

Figure 221: C/N+I Cdf (GSM Rx, Wideband Interference in Office Environment) ..... 283

Figure 222: C/N+I Cdf (GSM Rx, CISPR Interference in Home Environment)..... 283

Figure 223: C/N+I Cdf (GSM Rx, Reduced Coverage, CISPR Interference in Home Environment) 284

Figure 224: C/N+I Cdf (GSM Rx, CISPR Interference in Office Environment) ..... 284

Figure 225: C/N+I Cdf (GSM Rx, Reduced Coverage, CISPR Interference in Office Environment) 285

Figure 226: C/N+I Cdf (GSM Rx, CISPR Narrowband Interference in Home Environment) ..... 286

Figure 227: C/N+I Cdf (GSM Rx, CISPR Wideband Interference in Home Environment) ..... 286

Figure 228: C/N+I Cdf (GSM Rx, CISPR Narrowband Interference in Office Environment) ..... 287

Figure 229: C/N+I Cdf (GSM Rx, CISPR Wideband Interference in Office Environment) ..... 287

Figure 230: Interference Cdfs (FSS ES Rx, Narrowband Interference in Outdoor Environment) ..... 290

Figure 231: Interference Cdfs (FSS ES Rx, Wideband Interference in Outdoor Environment)..... 290

Figure 232: Interference Cdf (FSS ES Rx, CISPR Interference in Outdoor Environment)..... 291

Figure 233: Interference Cdfs (FSS ES Rx, CISPR Interference in Outdoor Environment With  
Narrowband Emission Characteristics)..... 291

Figure 234: Interference Cdfs (FSS ES Rx, CISPR Interference in Outdoor Environment With  
Wideband Emission Characteristics) ..... 292

Figure 235: Interference Cdf (GPS Rx, Narrowband Interference in Outdoor Environment)..... 294

Figure 236: Interference Cdf (GPS Rx, Wideband Interference in Outdoor Environment) ..... 294

Figure 237: Interference Cdf (GPS Rx, CISPR Interference in Outdoor Environment)..... 295

Figure 238: Interference Cdfs (GPS Rx, CISPR Interference in Outdoor Environment With Narrowband Emission Characteristics)..... 295

Figure 239: Interference Cdfs (GPS Rx, CISPR Interference in Outdoor Environment With Wideband Emission Characteristics)..... 296

Figure 240: C/N Cdf (FWA Rx, Home Environment)..... 299

Figure 241: C/N+I Cdf (FWA Rx, Narrowband Interference in Home Environment)..... 299

Figure 242: C/N Cdf (FWA Rx, Office Environment) ..... 300

Figure 243: C/N+I Cdf (FWA Rx, Narrowband Interference in Office Environment) ..... 300

Figure 244 : C/N Cdf (FWA Rx, Home Environment)..... 301

Figure 245: C/N+I Cdf (FWA Rx, Wideband Interference in Home Environment) ..... 302

Figure 246 : C/N Cdf (FWA Rx, Office Environment) ..... 302

Figure 247: C/N+I Cdf (FWA Rx, Wideband Interference in Office Environment)..... 303

Figure 248: C/N+I Cdf (FWA Rx, CISPR Interference in Home Environment)..... 303

Figure 249: C/N+I Cdf (FWA Rx, Reduced Coverage, CISPR Interference in Home Environment)304

Figure 250: C/N+I Cdf (FWA Rx, CISPR Interference in Office Environment) ..... 304

Figure 251: C/N+I Cdf (FWA Rx, Reduced Coverage, CISPR Interference in Office Environment)305

Figure 252: C/N+I Cdf (FWA Rx, CISPR Narrowband Interference in Home Environment)..... 306

Figure 253: C/N+I Cdf (FWA Rx, CISPR Wideband Interference in Home Environment) ..... 306

Figure 254: C/N+I Cdf (FWA Rx, CISPR Narrowband Interference in Office Environment) ..... 307

Figure 255: C/N+I Cdf (FWA Rx, CISPR Wideband Interference in Office Environment)..... 307

Figure 256: Interference Cdf (RAS Rx, CISPR Interference in Outdoor Environment) ..... 309

Figure 257: C/N Cdf (802.11b Rx, Office Environment) ..... 311

Figure 258: C/N+I Cdf (802.11b Rx, Narrowband Interference in Office Environment) ..... 312

Figure 259: C/N Cdf (802.11b Rx, Office Environment) ..... 312

Figure 260: C/N+I Cdf (802.11b Rx, Wideband Interference in Office Environment)..... 313

Figure 261: C/N+I Cdf (802.11b Rx, CISPR Interference in Office Environment) ..... 313

Figure 262: C/N+I Cdf (802.11b Rx, CISPR Narrowband Interference in Office Environment)..... 314

Figure 263: C/N+I Cdf (802.11b Rx, CISPR Wideband Interference in Office Environment) ..... 314

Figure 264 : T-DAB Home Scenario Results ..... 323

Figure 265: The Impact of Interference ..... 329

Figure 266: Single Entry Interference vs. Distance ..... 330

Figure 267: The Impact of Single and Multiple Interferers (T-DAB Scenario) ..... 331

Figure 268: The Impact of Single and Multiple Interferers (FWA Scenario)..... 332

Figure 269: The Impact of Reduced Interferer Population (FSS ES Scenario) ..... 333

Figure 270: The Impact of Reduced Interferer Population (GPS Scenario) ..... 334

Figure 271: The Impact of Reduced Interferer Population (GPS Scenario) ..... 335

## Abbreviations List

EUT	Equipment Under Test
FAR	Fully Anechoic Rooms
ISM	Industrial, Scientific and Medical
OATS	Open Area Test Site
MMN	Man Made Noise
MSC	Mode-Stirred Chamber
RMS	Root Mean Square
SRD	Short Range Devices
UWB	Ultra Wide Band
GSM	Global System for Mobile communications
PMSE	Programme Making and Special Events
WLAN	Wireless Local Area Network
DECT	Digital Enhanced Cordless Telephone
UMTS	Universal Mobile Telecommunications System
W-CDMA	Wideband Code Division Multiple Access
DAB	Digital Audio Broadcast
DTH	Direct to Home
T-DAB	Terrestrial Digital Audio Broadcasting
FSS ES	Fixed Satellite Service Earth Station
GPS	Global Positioning System
FWA	Fixed Wireless Access
RAS	Radio Astronomy

*This page is intentionally left blank*

## 1 Introduction

The Office for Communications (Ofcom) contracted a consortium led by ERA Technology and including Aegis Systems Ltd and QinetiQ to perform a study into Permitted Interference and EMC limits above 1 GHz. The main aims of the work were to try to identify the risk to Ofcom of the increasing use of electronic equipment and radio devices in the home, office and other environments. Ofcom want to ensure that there are sufficient standards in place to ensure that emissions from all noise sources do not degrade the quality of the spectrum.

Ofcom wish to identify if they can establish a “permitted noise metric” which Ofcom stakeholders might use to quantify expected interference in their licensed radio spectrum allocations, and recommend the level of this metric for various frequency bands. As demand for spectrum usage in the UK increases, this work will help Ofcom to guarantee a certain quality of the radio spectrum to the radio community in order to allow radio users to develop the maximum range of services in the limited spectrum available. In particular, Ofcom is increasingly being asked to keep the spectrum clean, define what interference can be expected in a piece of spectrum, and determine the causes of noise in a spectrum band. Spectrum liberalisation will increase the need to better define the quality of spectrum.

Ofcom’s strategy of spectrum liberalisation as defined in the Spectrum Framework Review (SFR)<sup>1</sup> is based on allowing market forces to drive improved efficiency of this scarce resource. Spectrum will change hands through spectrum trading, bandsharing, spectrum clearance programmes and auctions. Efficiency will be driven by pricing. In turn, spectrum users will be protected from increases in interference through the use of spectrum rights. In order to properly define these spectrum rights for each frequency band, information about the existing and future levels of both interference from intentional transmissions and background noise from unintentional emissions such as EMC is required.

It is not completely clear to what extent the radio spectrum is being polluted by unintentional emissions at present. There have however, been several studies that help indicate the contribution from Man Made Noise (MMN). ITU-R P.372 defines expected noise limits in a number of environments versus frequency. ITU-R P.372 is based on data gathered in the 1970s and is now the subject of several studies to update it to identify if there is increased background noise levels due to increasing amounts of MMN.

Over the last ten years there have been developments in CISPR to produce test methods and limits for emissions from ITE, and in 2005 CISPR Sub-committee I approved an amendment to CISPR 22, CISPR/I/151/FDIS [3] containing emission limits and methods over the frequency range 1-6 GHz which shortly is likely to be a European harmonized standard applicable to all information technology and multi-media equipment placed on the market in Europe.

---

<sup>1</sup> “Spectrum Framework Review”, Ofcom, 23<sup>rd</sup> November 2004

At higher frequencies, electronic devices may radiate from many parts of the equipment and can act like an antenna array, creating narrow beams of emissions in particular directions. Electronic equipment is continuing to operate at faster clock speeds with PCs now operating at speeds exceeding 3 GHz. It is envisaged that clock speeds may continue to increase up to the 10 to 20 GHz range. Future developments such as Ultra-Wide Band (UWB) and increased use of Short Range Devices (SRDs) will also add to the need to define and control the quality of the spectrum above 1 GHz.


There are only generalised maximum limits for spurious emissions from radio transmitters and many radio standards and ITU recommendations allow spurious and out-of-band emissions above 1 GHz at fairly high levels.

As opposed to measuring a very large number of locations with no known information about the specific sources at each location, a different approach to characterising background noise levels has been taken here. A range of electronic and radio devices have been measured in the laboratory to identify typical levels of EMC and spurious emissions, and probabilities of emissions occurring in any given band. These levels have then been input into a Monte-Carlo simulation. This simulation runs through a number of scenarios for the home, office and outdoor environments assuming a given density of devices.

Definition of the noise environment and ongoing monitoring should use the strengths of both modelling and measurements. It is more appropriate to measure very complex radiators such as electronic equipment. However, modelling can provide statistics over very wide areas, considering future systems that are not yet implemented, and covering a large array of scenarios within practical cost and time budgets.

## 1.1 Sources of Interference

Figure 1 below shows the different types of contributors to the electromagnetic noise environment [1].

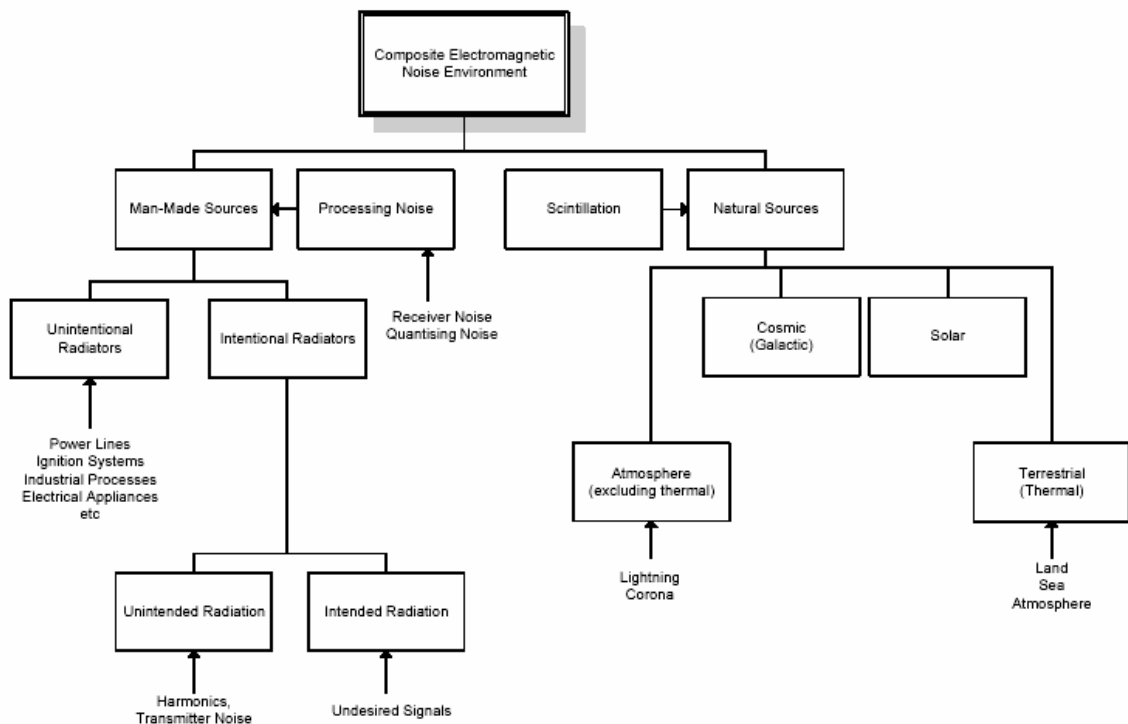

**Figure 1: Noise source contributors**


For the purpose of this study, the types of noise can be divided up into the following categories:

- Man-Made Noise (MMN) sources
  - Electrical and electronic equipment: e.g. computers, motors etc
  - Narrowband radio-communications: spurious and out-of-band emissions
  - Broadband radio-communications: e.g. UWB
- Natural sources
  - Thermal noise, lightning etc.

ITU-R Recommendation P.372-8 provides median values of man-made noise power (relative to the noise floor) based on measurements carried out in 1970s below 250 MHz in a number of environments including business, residential, rural and quiet rural, Figure 2. Measurement results indicate that the man-made noise power (dB) decreases linearly with  $\log(\text{frequency})$ .

A contribution from the UK to ITU-R Working Part 3J (Document 3J/15, November 2003) reports on man-made noise measurements in the UK. An example of low frequency noise is given in Figure 3. Measurements of both White Gaussian Noise (WGN) and Impulsive Noise (IN) are reported. WGN


results are plotted up to 1 GHz and show that  $F_a$  (defined as the mean man-made noise power relative to the noise floor) decreases linearly with  $\log(\text{frequency})$ , which agrees with Rec.372. The results also show that the man-made noise power values are higher than those given in Rec.372.

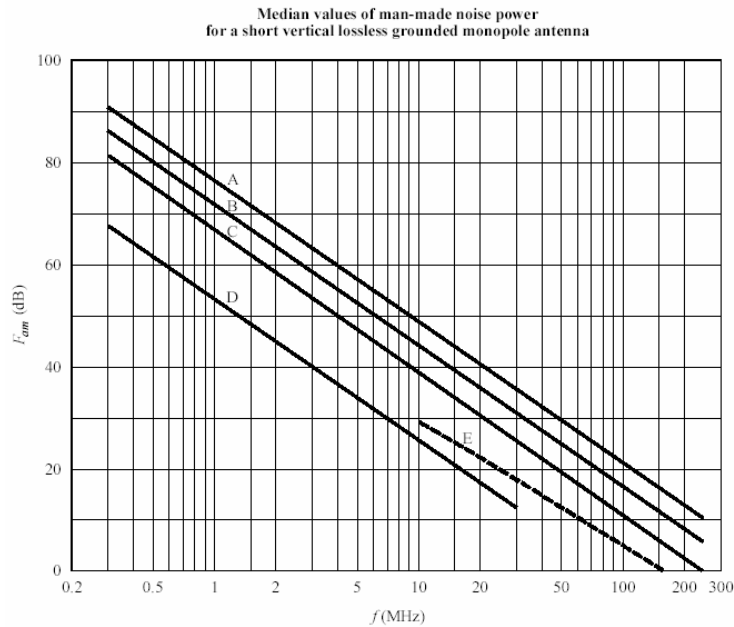

**Figure 2: Man-made noise levels in current version of P.372**

The mean and standard deviation of the IN voltage measurements are presented in units of  $\text{dB}(\mu\text{V}/\text{MHz})$  up to 3 GHz. It is suggested that both parameters fall-off with  $\log(\text{frequency})$  following a linear relationship, similar to the  $F_a$ .

A more recent contribution to ITU-R Working Party 3J (Document 3J/94, September 2005) outlines the results of man-made noise measurements below 1 GHz in business, residential and rural environments in Germany. Similar to the UK study, both WGN and IN measurement results are reported. Results indicate that, for example at 918 MHz, the median WGN power is measured to be in the range 0 - 2 dB above the noise floor. In the same document, Amplitude Probability Distribution (APD) graphs are provided to show the combined WGN and IN statistics. For example, at 980 MHz, plots indicate that the relative noise power is 3 – 5 dB above the noise floor.

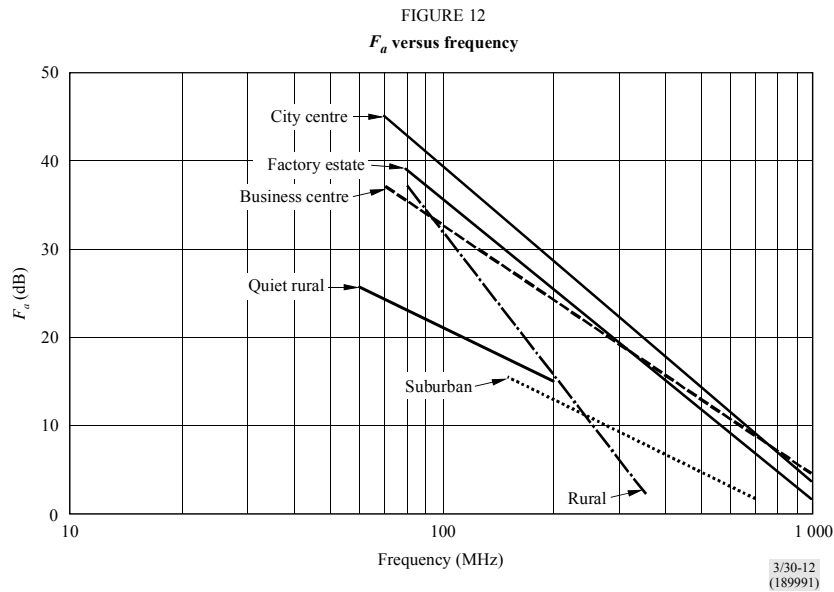


**Figure 3: Data on man-made noise in proposed revision of P.372 (ITU-R Document 3/30)**

## 1.2 Methodology Used in this Work for Estimating Noise Levels

It is thought that increases in background noise are most likely to be due the increased use of electronic equipment and radio equipment. There is an increased use of digital processor based electronic equipment used in the home, office, and other environment. This equipment also tends to operate at increasing clock speeds with 3 GHz processors now quite common. This could lead to increased EMC emissions. The increased use of radio devices e.g. mobile handsets, wireless LANS, DECT phones etc, may in addition lead to an increase in spurious emissions. There is also likely to be an introduction of broadband radio devices in the form of Ultra Wideband (UWB) devices which are intended to work at low power levels for short range high data applications such as wireless video streaming e.g. between a DVD player and a TV.

As opposed to measuring a very large number of locations with no known information about the specific sources at each location, a different approach has been taken here. A range of electronic and radio devices have been measured in the laboratory to identify typical levels of EMC and spurious emissions. These levels have then been input into a Monte-Carlo simulation. This simulation runs through a number of scenarios for the home, office and outdoor environments assuming a given density of devices. In addition, the emission limits in the various standards were used as an input to the simulations as well as the measurements for comparison.

Figure 4 shows the process for combining the input data from measurements and standards with the Monte-Carlo modelling.

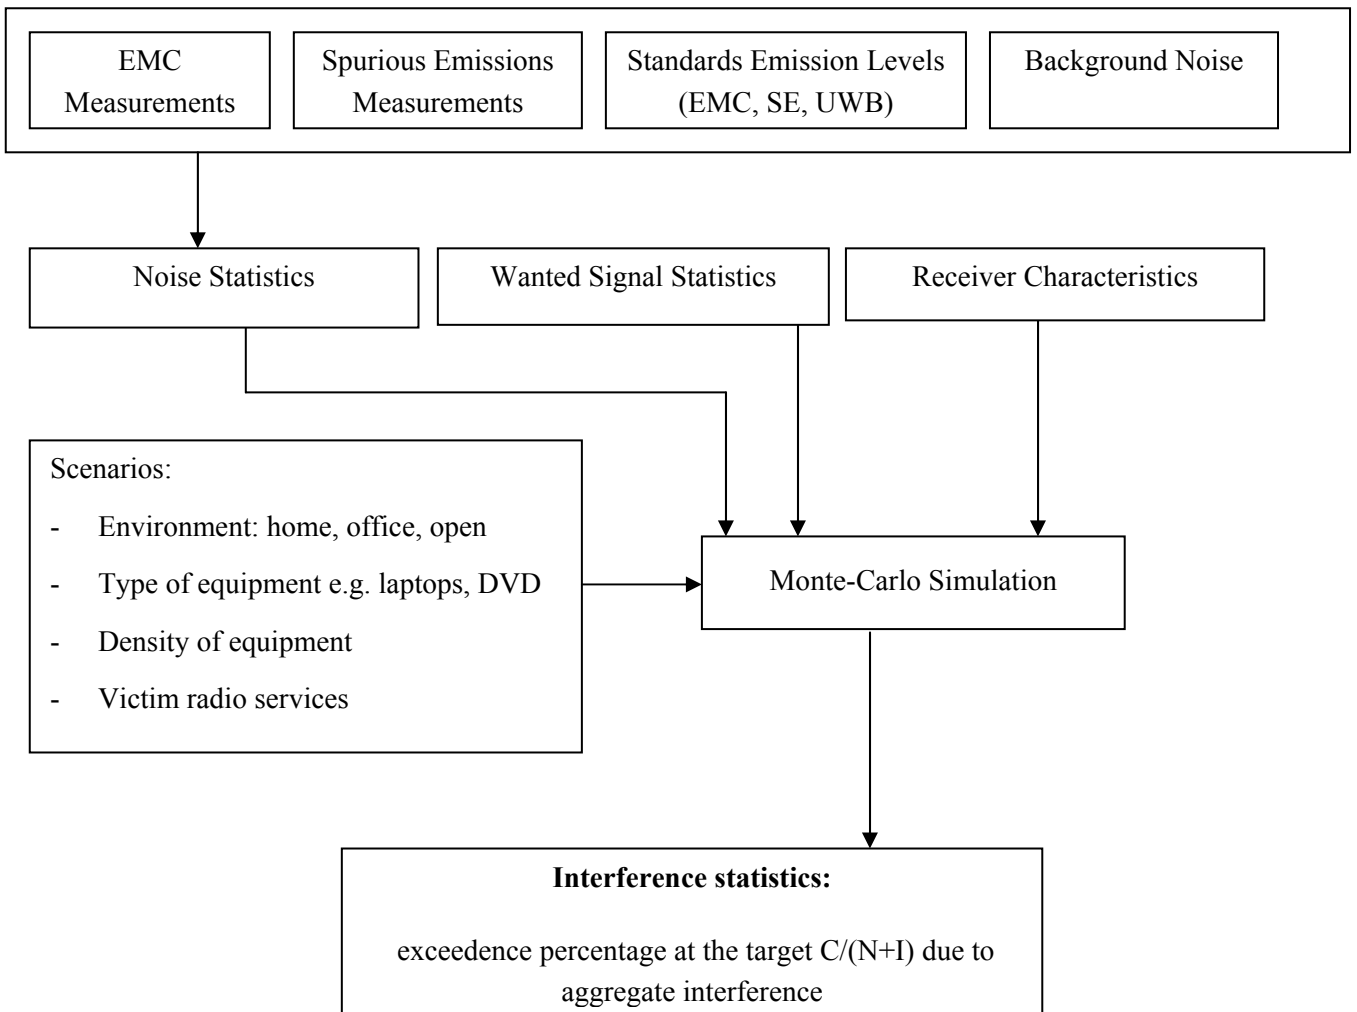

**Figure 4: Overview of methodology combining measurement of electronic and radio equipment with Monte-Carlo modelling**

## 2 Standards

There are a range of standards applicable to this study covering the areas of:

- EMC
- Spurious emissions
- UWB

These standards are reviewed in the following sections.

## 2.1 EMC Standards for Emissions Above 1 GHz

The main interest for the protection of radio services operating at frequencies above 1 GHz is associated with the interference that could be caused by information technology and multi-media equipment that could have widespread use. Electronic equipment (ITE, TV, etc) is continuing to operate at faster clock speeds with PCs now operating at speeds exceeding 1 GHz and it is envisaged that clock speeds may continue to increase up to the 10 to 20 GHz range.


Over the last ten years there have been developments in CISPR to produce test methods and limits for emissions from ITE, and in 2005 CISPR Sub-committee I approved an amendment to CISPR 22, CISPR/I/151/FDIS [3] containing emission limits and methods over the frequency range 1-6 GHz which shortly is likely to be a European harmonized standard applicable to all information technology and multi-media equipment placed on the market in Europe. The proposed radiated emission limits are presented in Table 1.

**Table 1:**  
**CISPR 22 amendment, proposed limits above 1 GHz**

Frequency range	Average limit, dB(uV/m)		Peak limit, dB(uV/m)	
	Class A ITE	Class B ITE	Class A ITE	Class B ITE
1-3 GHz	56	50	76	70
3-6 GHz	60	54	80	74

Note: Class A ITE are for commercial and industrial use, Class B is for residential use.

The CISPR test method above 1 GHz, which is basically similar to those at frequencies below 1 GHz, will be applied until more applicable methods are approved. Figure 5 shows a general description of the proposed CISPR A radiated field measurement method above 1 GHz.

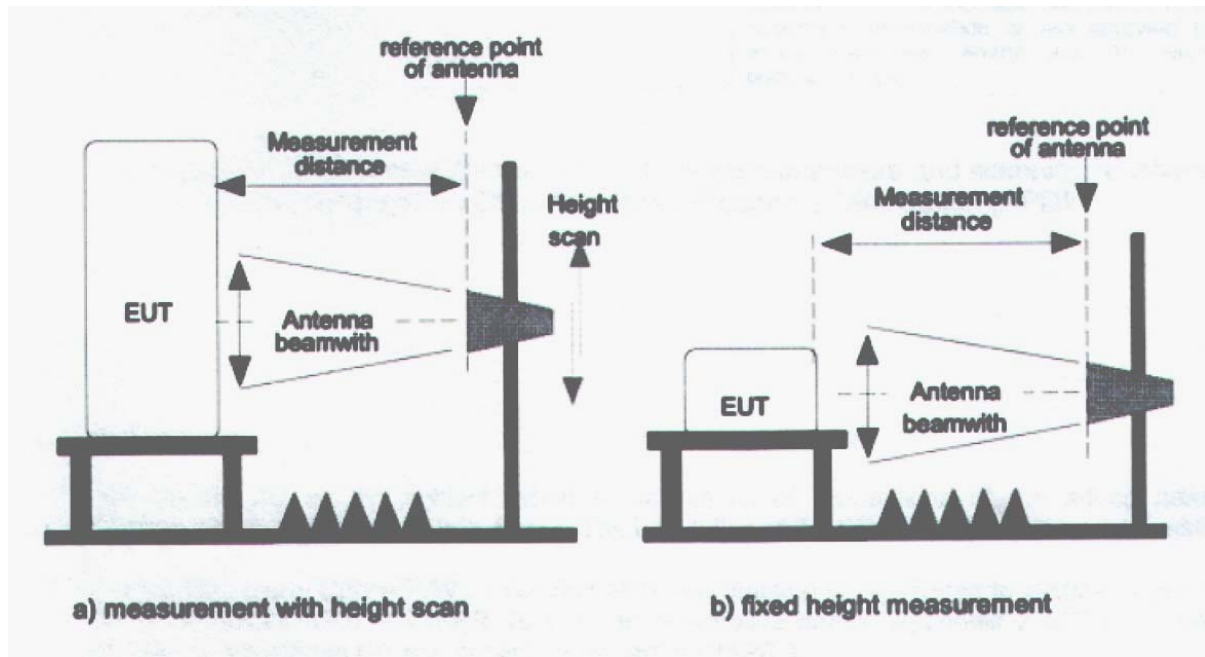

**Figure 5: Typical EUT measurement set-up**

The test facility is calibrated for a defined cylindrical space termed the “validated test volume” over which a calibrated energised antenna is placed and the observed fields determined by the measuring antenna are to be within a defined range. The directional properties of the measuring antenna are taken into account by determining the width of the main lobe at the location of the EUT. For EUTs, which are not encompassed by the 3dB beamwidth of the measuring antenna at the fixed height,  $h$ , the antenna shall be height scanned in order that the radiated emissions from the upper sections of the EUT are covered by the beamwidth dimensions. No such allowance is necessary for the horizontal direction because the search for maximum emissions is based on rotation of the turntable.

A 1 MHz resolution bandwidth is proposed for all measurements, with peak and average detectors. On a spectrum analyser, average measurements are made with a reduced video bandwidth.

The preferred test distance is 3 m provided the far field conditions are achieved, ie  $d > D^2/2\lambda$ , where  $D$  is the maximum aperture dimension of the measuring antenna and  $\lambda$  is the wavelength of the measurement. Measurements may be made at 1 m or 10 m and the data would be adjusted to the 3m values using free space propagation conditions.

Similar limits and test methods have been in force in the USA for a number of years as part of the Federal Communications Commissions (FCC) Code of Federal Regulations. The FCC limits for frequencies above 1 GHz, which are stated in Part 15, Sec. 15.109, are presented below in Table 2; this covers equipment categories of PC, computers and other digital devices.

**Table 2:**  
**FCC limits for digital devices**

Frequency range, GHz	Field strength limit, dB( $\mu$ V/m)			
	Class A (at 10m)		Class B (at 3m)	
	Peak	RMS Average	Peak	RMS Average
Above 0.96	N/a	49.5	N/a	54

For Class B equipment, e.g. residential PCs, the field strength limit is 7 dB more relaxed than the 37 dB $\mu$ V/m limit of EN 55022 (at 10 m), at frequencies below 1 GHz.

FCC measurements are performed on an open area test site (OATS) or can be performed in an absorber lined shielded enclosure provided it can be demonstrated that reflections do not adversely affect accuracy. The measurements are made with a receiver or spectrum analyser having a bandwidth of 1 MHz and an average detector. There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated. This applies unless a different peak emission limit is specified in the Rules, e.g. Sec. 15.255, Operation within the band 57 – 64 GHz; Sec.15.509, (Technical requirements for ground penetrating radars and wall imaging systems), and Sec 15.511, (Technical requirements for surveillance systems). The average detector used has a long time constant and significantly reduces the measured levels for any short duration transients.

Table 3 presents a comparison of the CISPR and FCC emission limits at 3m.

**Table 3:**  
**Comparison of limits at 3 m**

Frequency range	CISPR Average limit, dB( $\mu$ V/m)		FCC Average limit, dB( $\mu$ V/m)	
	Class A ITE	Class B ITE	Equivalent Class A ITE	Class B ITE
1-3 GHz	56	50	60	54
3-6 GHz	60	54	60	54

At frequencies above 3 GHz the limits are identical and below 3 GHz the CISPR limits are 4 dB more severe. It is likely that these limits, (if fully agreed) will be retained until there is strong pressure in the form of feedback from the manufacturers, or the operators. Any proposals would take several years to be implemented.

In terms of European standards for EMC above 1 GHz, other than the standard for microwave ovens, (EN 55011), there are currently no harmonized standards published in the OJEC for unintentional electromagnetic (EM) emissions from ITE and other equipment above 1 GHz in Europe. However the recent amendment to CISPR 22 for emissions measurements at frequencies above 1 GHz are likely to be presented to CENELC TC 210 for consideration as a harmonized standard relevant under the EMC Directive 89/336/EEC.

Countries such as Canada, Australia and Japan are likely to update their standards according to the proposed changes to CISPR 22.

Any limits developed should provide, with reasonable probability, adequate protection to radio services. Furthermore there needs to be an acceptable cost to manufacturing industry who have to meet the emission limits in terms of the costs of design to comply and the costs of testing to demonstrate compliance. However, designing for EMC at the early stages of product development usually deals with design cost issues since low cost options can be chosen.

Complaint statistics in the radio service bands at frequencies above 1 GHz are somewhat minimal. These would be useful to establish a balance between protection requirements and manufacturing costs, and the established emission limits based on compromise.

The measurement test method should be capable of determining the interference potential of emissions from the EUT to a reasonable (or known) degree of accuracy. Previous work on emissions from products at frequencies above 1 GHz [2] indicated a field strength measurement uncertainty of 4-6 dB even under well controlled conditions and the method applied has to be sufficiently well designed to ensure repeatability and reproducibility of results from different laboratories. There is a possibility that high gain lobes will be observed at higher frequencies and could impact on probabilities of encountering maximum radiation. A measurement of a devices total power radiated has some advantages. The reverberation chamber technique, described in Section 4, does provide a measure of the devices total radiated power and thus has encouraged the use of this method in addition to an expansion of the standard CISPR field strength measurement techniques that have proved effective for many years.

In the future, there are likely to be some considerations given to convergence of the test facilities for all EMC radiated emission (and immunity) measurements and there is likely to be convergence on two basic facilities, Fully Anechoic Rooms (FAR) and Mode-Stirred (Reverberation) Chambers (MSC). In IEC/CISPR there have been several attempts at a unified test facility for both emissions and immunity testing where a single set up and EUT configuration for both tests would be used. This would be valuable where existing commercial facilities can be updated with minimal changes.

The mode-stirred (reverberation) chamber has significant advantages for some EMC work, mainly in the military sector where very high fields are required to simulate the effects of powerful transmitters at close distances. Work has been done to investigate the possibility of emissions measurements and the main advantage is that the results are in the form of the total effective radiated power from an

EUT which can be interpreted to assess the possible interference potential of the equipment. These limits have yet to be fully developed but will permit an effective assessment of a product which does not require a search for high gain lobes and should give more accurate assessments. The disadvantage is that the facility costs are quite high and will not be appealing to commercial businesses.

## 2.2 Spurious Emissions Standards

The spurious emission levels for the radio devices to be considered are defined by ETSI standards. Examples of the spurious emission levels detailed in the standards are given here.

Spurious emission limits for T-DAB transmitters shall not exceed the values set out in Table 4 for the frequency range 9 kHz to 1 GHz or 3<sup>rd</sup> harmonic whichever is higher.

**Table 4:**  
**Spurious emission limits for T-DAB transmitter**

Frequency range of the spurious emission (MHz)	Limits of the spurious emission	Reference bandwidth (kHz)	Figure
9 kHz - 174	-36 dBm (250 nW)	100	4.1
> 174 - 400	-82 dBm, for $P \leq 25$ W -126 dBc, for $25$ W < $P \leq 1$ 000 W -66 dBm, for $1$ 000 W < $P$	4	4.2
> 400 - 1 000	-36 dBm (250 nW)	100	4.1
> 1 000 - 1 452	-30 dBm (1 $\mu$ W)	100	4.1
> 1 452 - 1 492	-62 dBm, for $P \leq 25$ W -106 dBc, for $25$ W < $P \leq 1$ 000 W -46 dBm, for $1$ 000 W < $P$	4	4.2
> 1 492	-30 dBm (1 $\mu$ W)	100	4.1

NOTE: P = mean power of the transmitter.

As defined in EN 301 511 [10] and TS 151 010-1 [11], the spurious emissions limits for a GSM base station transmitter are shown in Table 5, and the limits for the mobile handset in Table 6.

**Table 5:**  
**Requirements for DCS BSS transmitter spurious emissions in receiver bands**

	GSM BSS receive band (dBm)	DCS 1800 BSS receive band (dBm)
Normal BTS	-98	-98
Micro BTS M1	-91	-96
Micro BTS M2	-86	-91
Micro BTS M3	-81	-86

**Table 6:**  
**MS allocated channel spurious emission power levels**

Frequency range		Power level in dBm		
		GSM 400, GSM 700, GSM 850, GSM 900	DCS 1 800	PCS 1 900
30 MHz to	1 GHz	-36	-36	-36
1 GHz to	4 GHz	-30		-30
1 GHz to	1 710 MHz		-30	
1 710 MHz to	1 785 MHz		-36	
1 785 MHz to	4 GHz		-30	

The spurious emissions from a wireless LAN transmitter are covered by EN 300 328 v 1.6.1 (2004-11) [12] and shall not exceed the values in the indicated bands as shown in Tables 7 and 8 below, for narrowband and wideband emissions.

**Table 7:**  
**RLAN transmitter limits for narrow band spurious emissions**

Frequency range	Limit when operating	Limit when in standby
30 MHz to 1 GHz	-36 dBm	-57 dBm
above 1 GHz to 12,75 GHz	-30 dBm	-47 dBm
1,8 GHz to 1,9 GHz 5,15 GHz to 5,3 GHz	-47 dBm	-47 dBm

**Table 8:**  
**RLAN transmitter limits for wide band spurious emissions**

Frequency range	Limit when operating	Limit when in standby
30 MHz to 1 GHz	-86 dBm/Hz	-107 dBm/Hz
above 1 GHz to 12,75 GHz	-80 dBm/Hz	-97 dBm/Hz
1,8 GHz to 1,9 GHz 5,15 GHz to 5,3 GHz	-97 dBm/Hz	-97 dBm/Hz

## 2.3 UWB Standards

### 2.3.1 FCC and NTIA recommendations

In the United States, the FCC, in co-ordination with the National Telecommunications and Information Administration (NTIA), have developed rules for unlicensed UWB devices under 47 Code of Federal Regulations Part 15 [13]. The regulation sets out guidelines under which an intentional, unintentional, or incidental radiator may be operated without an individual license. Part 15 stipulates that unlicensed devices are subject to the condition that no harmful interference is caused to licensed services and that harmful interference to unlicensed devices must be accepted. It is recognised and stated in Part 15.5 (c) that; “the limits specified in this part will not prevent harmful interference in all circumstances.”

The FCC has defined a UWB device to be any intentional radiator of RF energy, which has a 10 dB bandwidth of 25% of the strongest frequency within that 10 dB bandwidth or a 10 dB bandwidth of equal to or greater to 500 MHz [13]. These devices do not conform to the usual frequency allocation table and associated FCC regulations, because of these extremely large bandwidths.

The FCC regulation sets out a “mask” with an upper limit of  $-41.3$  dBm/MHz as the amount of power that can be radiated at any particular frequency by a UWB device within the core band of 3.1-10.6 GHz. The FCC UWB limits are shown in Figure 6.

### 2.3.2 ECC recommendation

Decision ECC/DEC/(06)04 on the harmonised conditions for devices using UWB technology in bands below 10.6 GHz has been finally adopted by the European Communications Committee (ECC) at its meeting 20 – 24 March 2006 in Oulu (Finland).


The baseline solution for UWB operation in Europe is twofold and is based on a consensus reached between Conference of Postal and Telecommunication administrations (CEPT) administrations:

- Operation in band 6 – 8.5 GHz, subject to maximum power density levels and without requirement for additional mitigation.
- Operation in band 3.1 – 4.8 GHz, subject to maximum power density levels and to the implementation of adequate mitigation techniques, which requirements are to be defined and effectiveness is to be validated.

No consensus has been reached on the inclusion of regulatory provisions for a phased approach in the band 4.2 – 4.8 GHz without mitigation techniques.

Draft ECC Decision ECC/DEC/(06)EE has been developed in complement to Decision ECC/DEC/(06)04 and is currently focused on the principle of a possible harmonised transition measure applicable to frequency band 4.2 – 4.8 GHz since no technical requirements are currently available for mitigation techniques considered in the frequency band 3.1 – 4.8 GHz.

Additionally, new UWB devices are exceptionally permitted until [30 June 2010/2012] to operate in the frequency band 4.2 - 4.8 GHz with a maximum mean EIRP density of  $-41.3$  dBm/MHz and a maximum peak EIRP density of 0 dBm/50 MHz without the requirement for additional mitigation

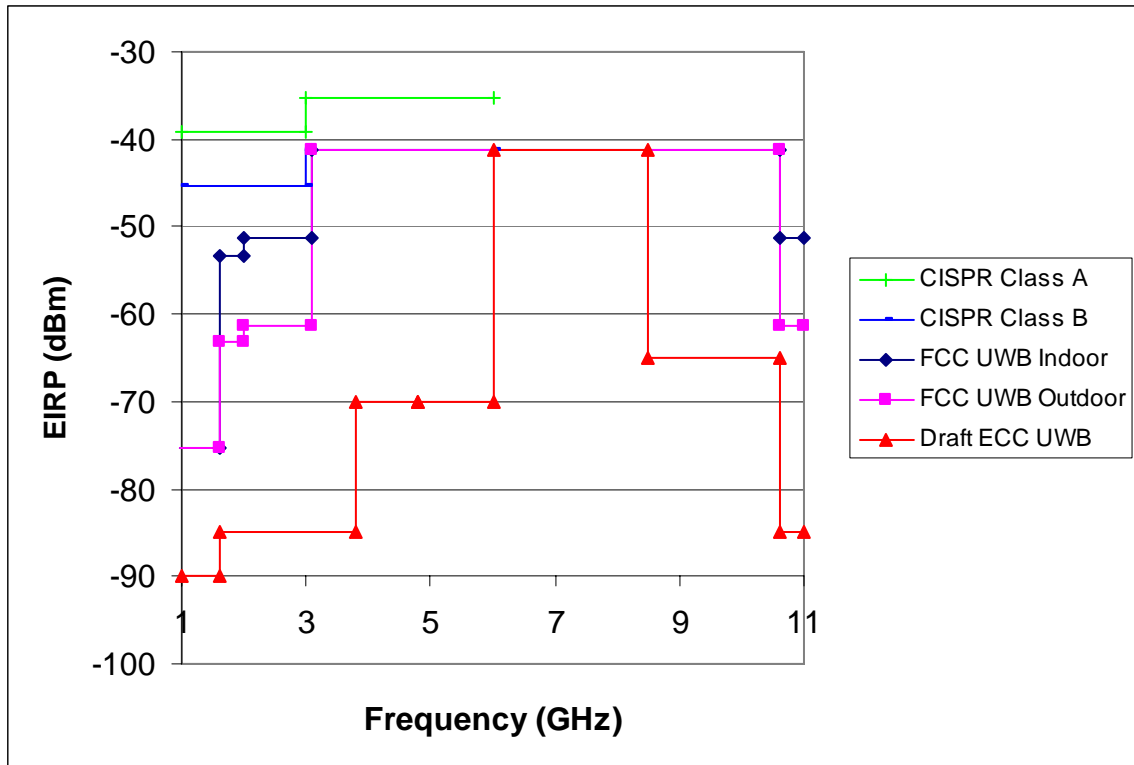

**Figure 6: FCC and draft ECC UWB mean EIRP limits compared with CISPR average emission limits in a 1 MHz band**

Figure 6 above shows the comparison between CISPR average emission limits above 1GHz for Class A (Industrial) and Class B (Residential) and mean UWB limits set by the FCC and proposed by the ECC.


### 3 Review of Existing Research Studies for Noise Above 1 GHz

ERA carried out a programme of work for the Radiocommunications Agency, now Ofcom, in 2002 [2] with the objective of developing test methods and limits for emissions tests to provide adequate protection for radio services above 1 GHz, suitable for submission to CISPR. The test method should be acceptable, pragmatic, and relatively economical in terms of facilities that give repeatable and reproducible results. To address concerns that EUT emissions above 1 GHz are likely to be directional, the RF emissions were measured using a Hemispherical Measurement Range shown in Figure 7.



**Figure 7: The Hemispherical Measurement Range**

Examples of measurements made with the Hemispherical Measurement Range are shown below for frequencies of 1 GHz and 10 GHz. The results show that the emissions become increasingly directional with increasing frequency above 1 GHz, Figure 8. These are in the form of Logarithmic Spherical Plots at frequencies of 1GHz, 3GHz and 10 GHz.

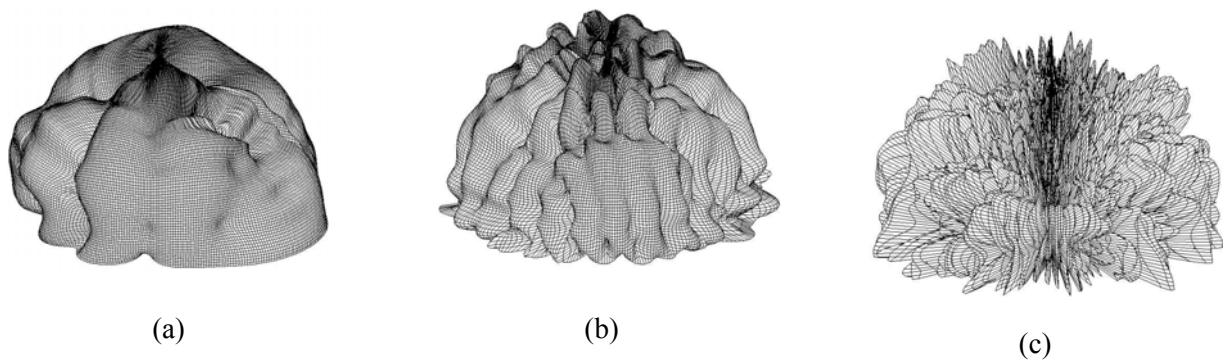

**Figure 8: EMC emissions a) at 1 GHz; (b) at 3 GHz; (c) at 10 GHz)**

Limits were derived from the work of CISPR and research papers. A limit of 57 dB( $\mu$ V/m) was proposed for the frequency range 1 to 2.7 GHz, and a limit of 65 dB( $\mu$ V/m) over the range 2.7 to 6 GHz. The measurement uncertainty budget for the measurement chain of the proposed test method was approximately  $\pm 5$  dB to a 95% confidence level, following the procedures of the UKAS

document Lab 34 [15]. Overall the uncertainty budget is only slightly greater than the typical values (+/-4 dB) for measurement at frequencies below 1 GHz.

The ERA/BT proposal to CISPR I was rejected but the latest CISPR I proposal is a watered down approach and may give rise to lower levels of control as a result of the low probability of capturing the maximum fields of the high gain lobes.

The Man Made Noise Measurement Programme [16] carried out by MASS Consultants developed a methodology and gathered measured data for updating ITU-P.372. The MASS measurement system was tested at 8 sites and it was proposed that a large number of measurements should be made using the test jig developed in order to gather a more statistically relevant set of data. A range of noise metrics was measured. It was noted that there appears to be evidence showing an increased level of MMN over the last few decades, although this is to be confirmed.

A study by Quotient [17] into the potential economic impact on the UK spectrum of Ofcom not undertaking technical research and standards work in the area of EMC, considered the probability of interference in office and home environments to LW/MW/FM radio, DAB radio, PAL, DVB-T, mobile services, etc. This work details a range of sources that were considered for different environments and estimates of the percentage of the environment that could be affected by different levels of interference, although the work concentrates on frequencies below 1 GHz.

York EMC Services developed a mathematical model [18] to try and predict the radiation patterns from typical EUTs. A simple generic EUT shielded box with slots containing a Comparison Noise Emitter source was used. York EMC Services then performed a second study using the same simple EUT and undertook detailed electromagnetic modelling to try to reduce measurement times for EMC tests, particularly above 1 GHz. A simple point source model was used, and it was shown that even with a simple source it proved difficult to accurately model the statistics of the EUT emissions under consideration due to the complexity of the interactions.


## 4 Measurements

Laboratory measurements were made of the EMC emissions and spurious emissions from a range of modern electronic equipment and radiocommunications equipment. These measurements provided data on the actual emissions of typical equipment such as emission levels and the probability of emissions occurring from 1 to 6 GHz.

Emission measurements were made in both a fully anechoic room (FAR) and a stirred-mode chamber. The new CISPR standards specify the use of a fully anechoic chamber. The stirred-mode chamber was used in addition as it might be considered in the future as an alternative technique and can easily capture emissions in all directions which was seen as a potentially attractive solution due to the increased directionality of emissions from equipment at higher frequencies.


The fully anechoic room consists of a shielded metallic room which has RF absorber on all internal walls which minimises the reflections in all directions. An example of the fully anechoic room is

shown in Figure 9. The equipment under test (EUT) is rotated and the measurement antenna height varied to allow the worst-case emissions to be captured. This method gives a direct measure of absolute field strength.

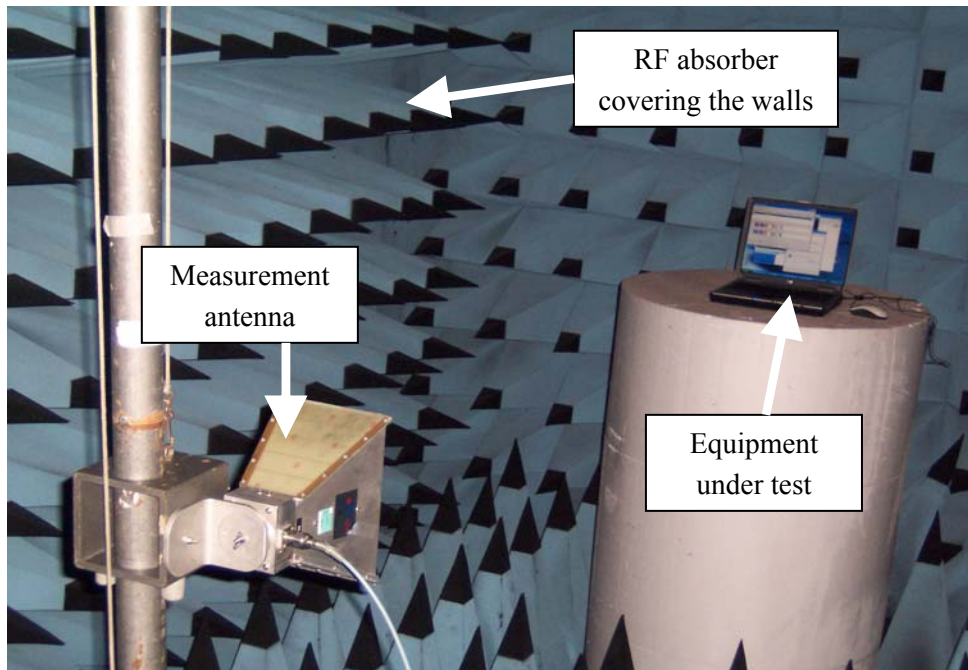

**Figure 9: The fully anechoic room**

The mode-stirred chamber is also called a reverberation chamber and this is because it makes use of the reflections off the metal walls of the chamber, Figure 10. However, the path loss between the EUT and the antenna will vary with frequency and location of the EUT and the antenna. For this reason, a paddle wheel is used which rotates and “mode-stirs” the chamber by continually changing the direction of the reflections within the chamber removing the dependence on the location of the EUT and the antenna and allowing a repeatable measurement. As opposed to the fully anechoic room measurement described above which gives a direct measure of field strength in the absence of reflections from a particular part of the EUT, the received field strength for the stirred-mode chamber is an instantaneous combination of multiple reflections from all parts of the EUT, and the absolute field strength needs to be calculated by comparison to a reference transmitter such as a dipole antenna, which can lead to errors. It should be noted that an alternative reverberation chamber technique to mode-stirring is mode-tuning.

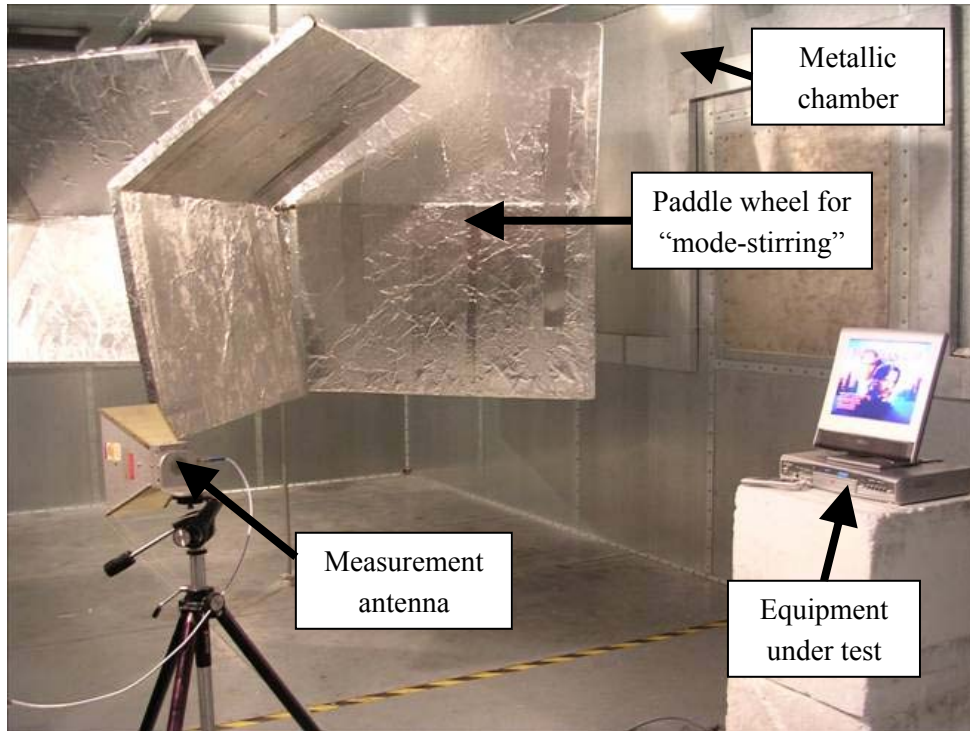

**Figure 10: The stirred-mode chamber**

## 4.1 Products Tested


The types of product to be examined were based on the fact that large market entry would give rise to widespread potential interference problems if not adequately protected. The products listed below were selected on that basis and have been tested with their operating conditions set to represent the most typical configurations, i.e. normal operating mode and worst-case scenario if the set-up allows.

1. **DVD Player – Goodmans X-Pro.** Tested in normal operating mode, playing DVD and displaying the output on LCD TV.
2. **DECT Phone – Twin Set Digital Cordless Phone.** Tested in intercom mode – dialling an internal call between the two handsets.
3. **Desktop PC – Packard Bell I Media Pentium 4 - 2.9GHz CPU – 512M RAM.** Tested in worst-case scenario using special software that exercises the CPU usage to up to 95%.
4. **HP Laptop – Compaq nx9010 – 2.6GHz CPU – 512 RAM.** Tested in worst-case scenario using special software that exercises the CPU usage to up to 95%.

5. **Multimedia System – Philips.** The wireless transmitter was enabled to allow multimedia file streaming between the product and the laptop PC. The output of the received files was displayed on the LCD TV.
6. **XBox 360 Core system.** Tested in normal operating mode – Using a demo game that exercises the CPU, graphic cards and input and output ports.

## 4.2 The Fully Anechoic Room (FAR) Measurement Configuration

Figure 11 shows the basic CISPR standard test set up for the measurement of emissions from the six equipment systems examined. The equipment under test was placed on an insulating support of 1.7 metres height and the receive antenna was placed at a height,  $h$ , of 1.9 metres.

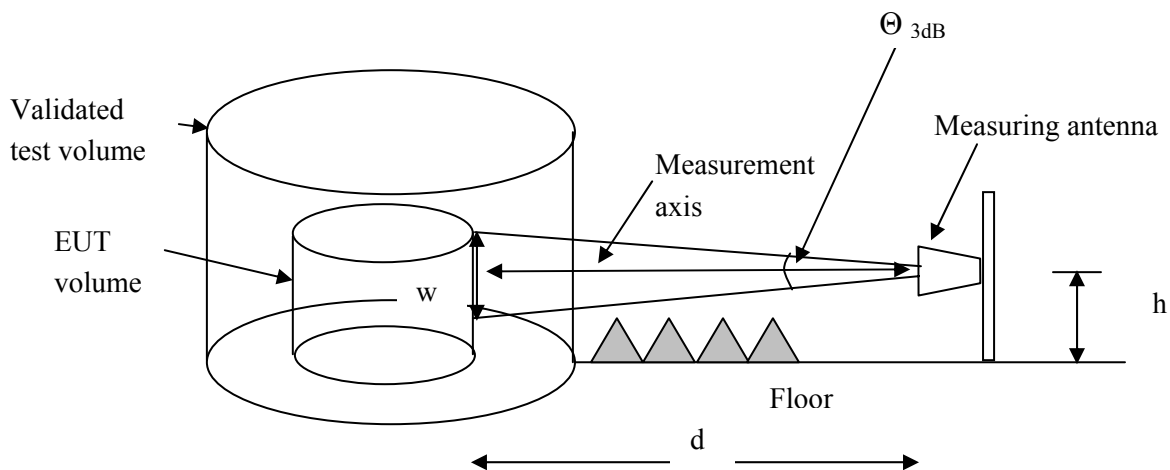

**Figure 11: CISPR validated test volume measurement set-up**


As the antenna 3 dB beamwidth is finite, the area of the equipment under test (EUT) that it covers, shown as “ $w$ ” in Figure 11, may be smaller than the EUT dimensions. As the EUT will be rotated, emissions from all sides of the EUT will be captured. However, if the EUT height is larger than the antenna beamwidth “ $w$ ”, then the measurement antenna would have to be scanned with height. For the equipment tested during this study, no antenna height scanning was required in the frequency range of concern (1 to 6 GHz) due to the small dimensions of the EUTs used.

The sweep time of the spectrum analyser was set such that the selected frequency span can be swept within a time that is equal or less than the time needed for the turntable to rotate 15 degrees. The product under test was then rotated from 0 to 360 degrees; this enabled the spectrum analyser to capture the maximum peak emissions from the EUT in the frequency ranges of 1 to 6 GHz. This method was then repeated for other orthogonal scans, resolution bandwidths and antenna polarisations.

The products under test (operating in normal mode or worst case scenario) were placed on a turntable at 3m distance from the measuring antenna, for peak measurements, the spectrum analyser is set to peak detector with max hold set-up to detect the maximum emission profiles generated by the EUT.

The emission measurements have been carried out with spectrum analyser resolution bandwidths (RBW) of 1 MHz, 300 kHz and 100 kHz, using both peak and average detectors. The CISPR method requires a resolution bandwidth of 1 MHz but additional bandwidths were used in order to determine the preferred options for radio service protection. Field strength measurements were made in both vertical and horizontal antenna polarisations.

The EUT was tested with the vertical axis of the equipment placed in three orthogonal axes, X, Y and Z as shown in Figure 12.

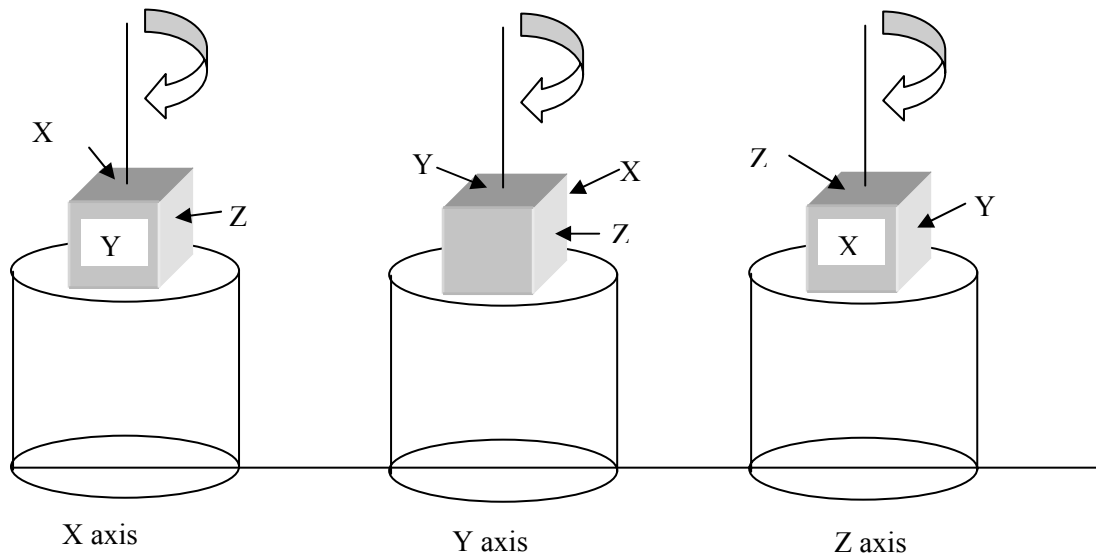

**Figure 12: EUT configurations for the X, Y and Z axis measurements**

For each axis the EUT was rotated through 360 degrees by the operation of the turntable so that information was obtained on two vertical scans through 360 degrees in addition to a single horizontal rotation. Only one (X axis) rotation is required by CISPR; the aim of this assessment was to determine whether the CISPR method fully captured the maximum radiation levels.

### **4.3 The Reverberation Chamber Measurement Configuration**

The EUT radiated emissions were measured over the required frequency range, in this case 1 to 6 GHz. Each EUT was set-up using a non-conductive support with the EUT positioned at least  $\lambda/4$  from the chamber boundaries and paddle wheel/tuner, where  $\lambda$  is the wavelength at the lowest

measured frequency. In this case 1 GHz relates to a full  $\lambda$  of 30 cm, thus the EUT must be greater than 7.5cm from all boundaries and any conductor within the chamber. For all EUT radiated emissions measurements the receive antenna was directed towards the paddle wheel or tuner, to avoid direct illumination from the EUT.

Within an anechoic chamber or OATS the measured radiated emissions parameter is in terms of E-field ( $\text{dB}\mu\text{V}/\text{m}$ ) with limits based on defined EUT to antenna distances, measurement bandwidths and receiver detectors. Conversely, within the reverberation chamber the parameter measured is the antenna base voltage ( $\text{dB}\mu\text{V}$ ). Using the corrected antenna base voltage measurement it is possible to determine the amount of total radiated power ( $P_{\text{radiated}}$ ) radiated by the EUT. During this investigation the paddle wheel/tuner was rotated for a minimum of 5 complete rotations per measurement band for the continuous mode stirred method, to ensure the maximum total radiated power was detected. For the two devices tested employing mode-tuned methods, 30 discrete paddle or tuner steps were employed over 1 rotation of the paddle/tuner.

#### **4.4 Fully Anechoic Room (FAR) Test Results**

The complete fully anechoic room (FAR) test results are reported in Annex A. A selection of the results is shown below. Figures 13 and 14 show the emission from the laptop using a peak and average detector, respectively. Figures 15 and 16 show the peak emissions from the desktop PC, and the X-box, respectively. The X-box has an in-built Wi-Fi system which can clearly be seen. All of the results are compared to the CISPR limit lines. It can be seen that in all cases the measured emission levels are well below the CISPR limit lines. For the peak detector measurements, the emissions from all of the equipment measured are typically 15 to 20 dB below the limit line, except for the 2.6 GHz clock emission for the laptop which is about 13 dB below the peak limit line. For the average measurements the emissions were typically 10 to 15 dB below the limit line, except for the 2.6 GHz clock emission for the laptop which is about 6 dB below the average limit line.

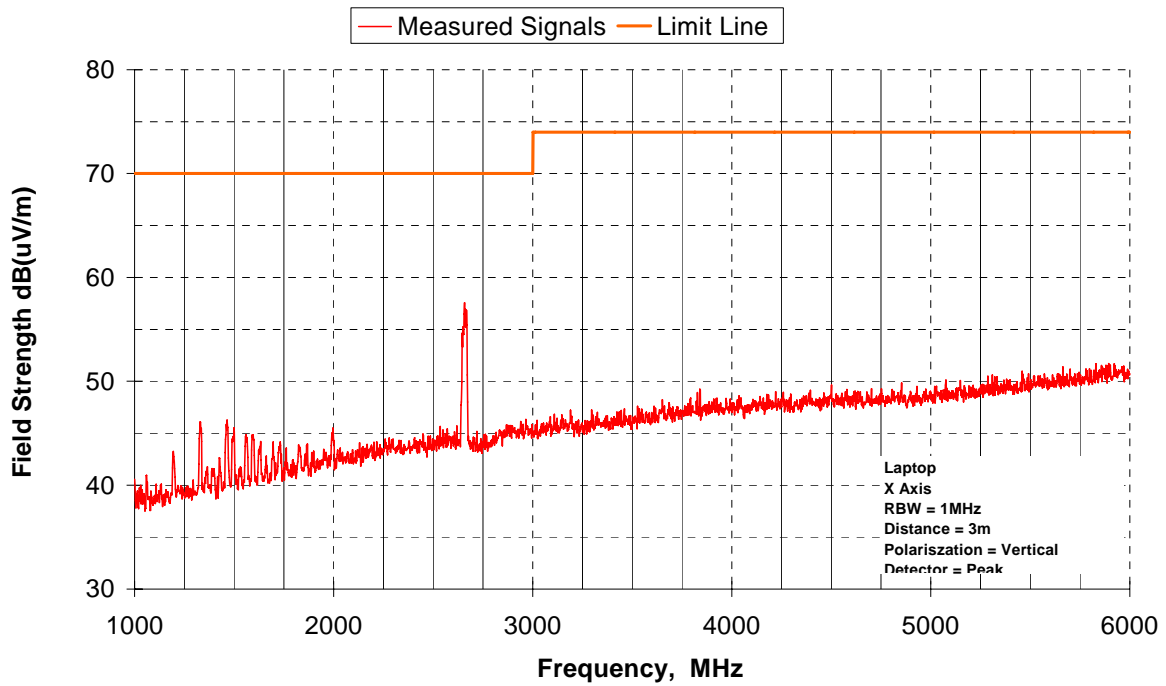


Figure 13: Emissions from laptop with 1 MHz bandwidth and peak detector

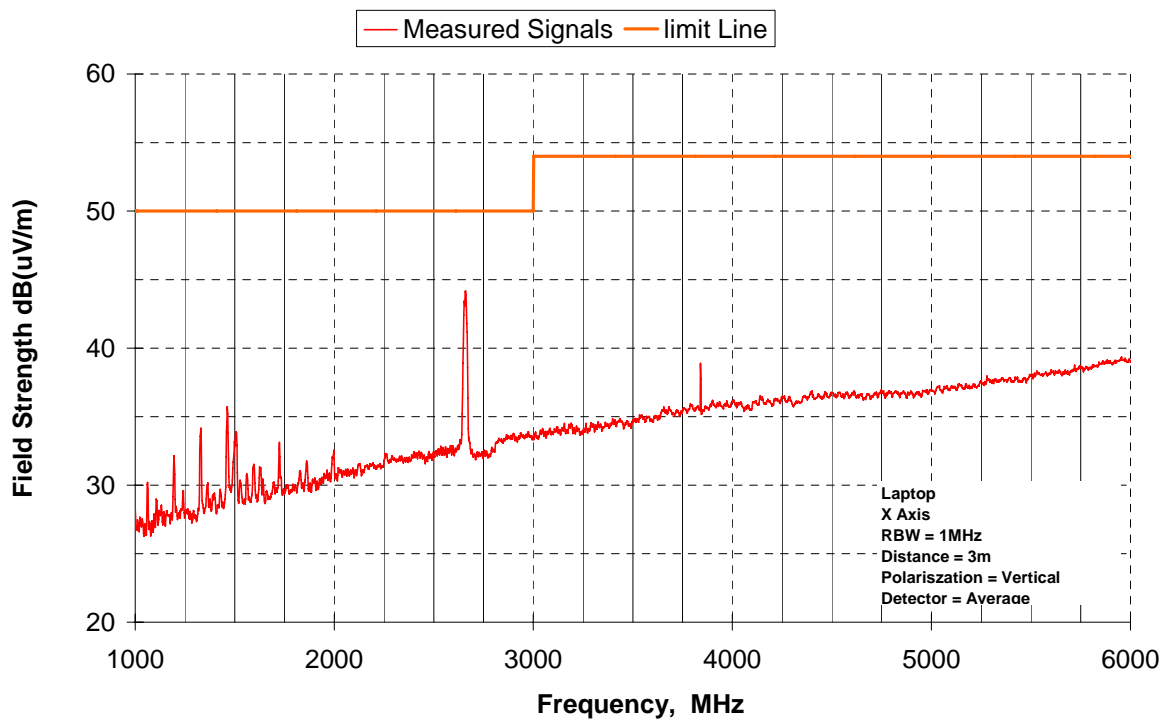


Figure 14: Emissions from laptop with 1 MHz bandwidth and average detector

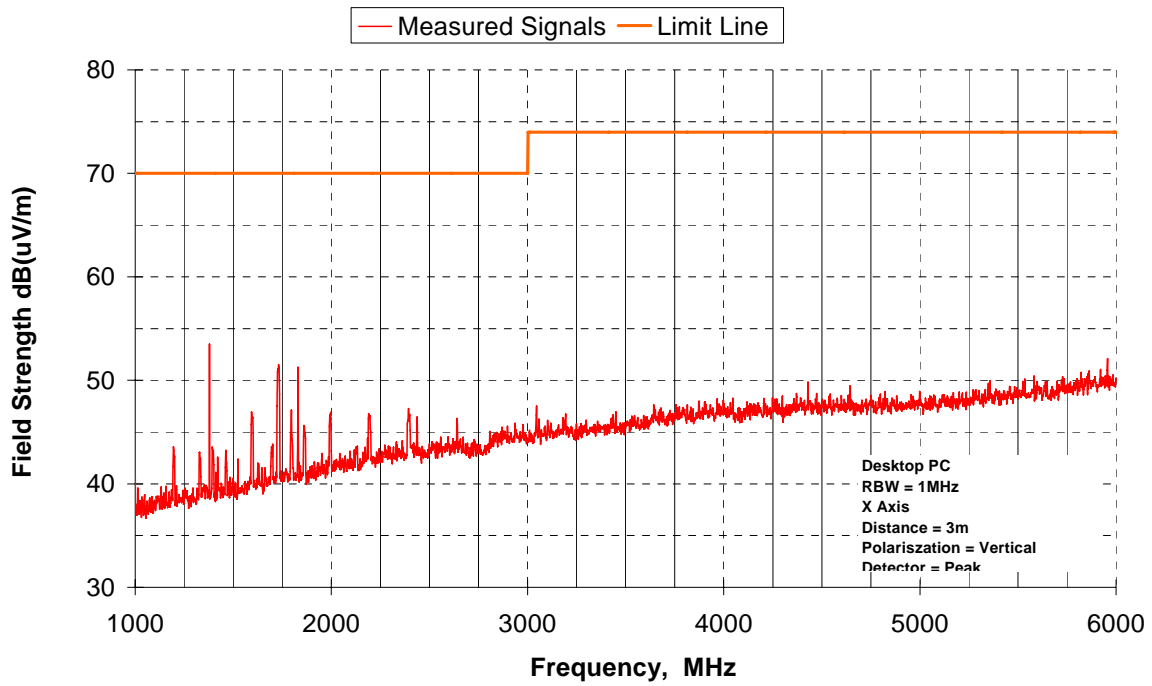


Figure 15: Emissions from desktop PC with 1 MHz bandwidth and peak detector


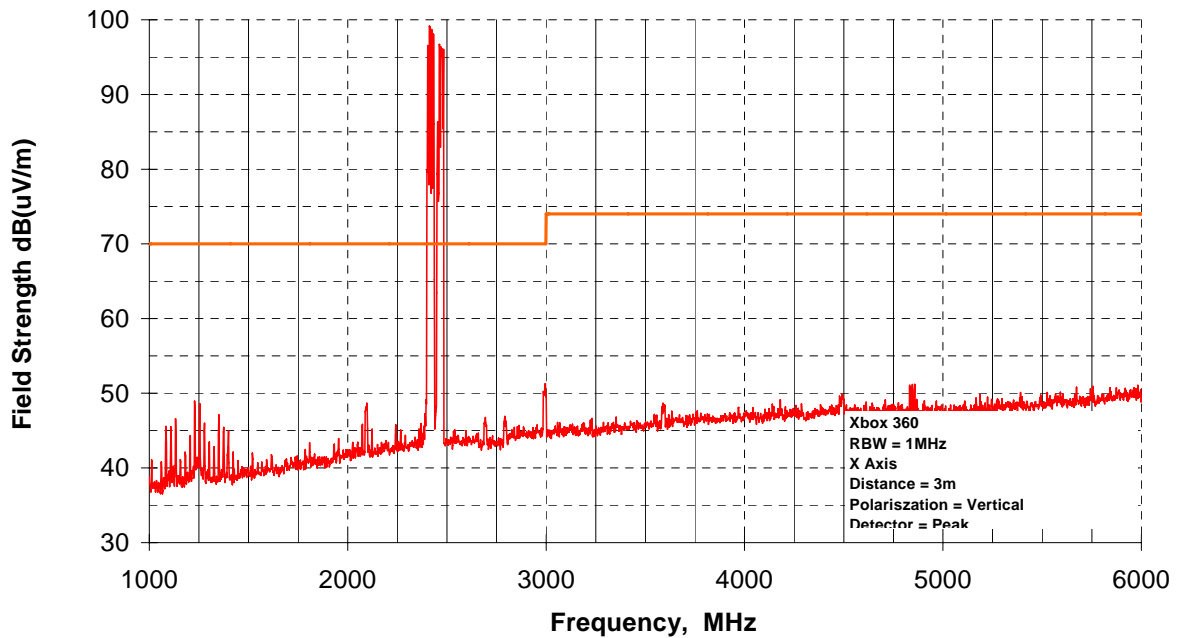


Figure 16: from X-Box with 1 MHz bandwidth and peak detector

#### 4.4.1 Field strength polar distribution

The products under test were also scanned to detect the field strength distribution from all orthogonal planes (X, Y, Z). Different frequencies at high field strength levels were measured for each product. The complete measurements results are presented in Annex A.

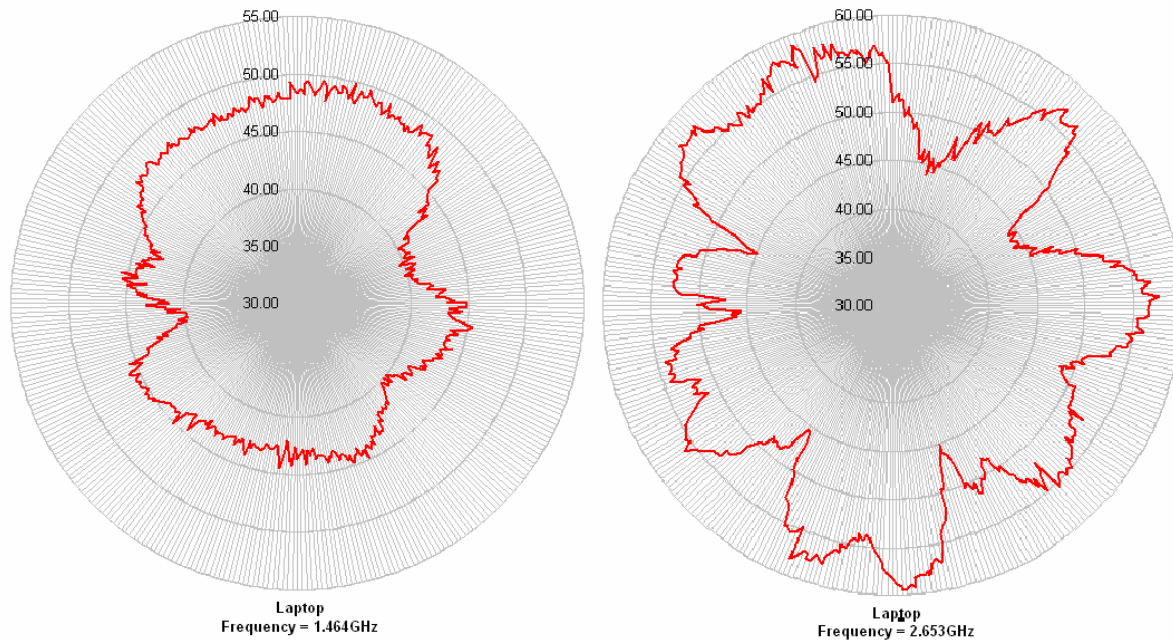

**Figure 17: Polar distribution of the laptop emissions in the x-axis: (a) at 1.464 GHz and (b) at 2.653 GHz**

The radiation patterns at higher frequencies had a number of very directional peaks.

#### 4.5 Reverberation Test Results Assessment

The results of the reverberation chamber measurements performed by Qinetiq are presented in Annex A and a summary is given here. When making comparisons it must be considered that the directivity of the devices was not known when calculating the equivalent radiated field. Unless the device tested was purely isotropic, the estimated E-fields from the reverberation chamber method may be ‘artificially’ lower than the ‘worst case’ value measured within the FAR. There are a number of other factors that could impact the comparison between measured emissions, some of these can also exist within conventional techniques, for example, turntable rotation speed, cable layout, antenna scan rate, equipment cycle/dwell time.

An example of the mode-stirred chamber results is given in Figure 18 for the laptop. The main CPU clock frequency and second harmonic are clearly measured. The CPU fundamental frequency of 2.6 GHz, is over 20 dB below the peak limit defined.

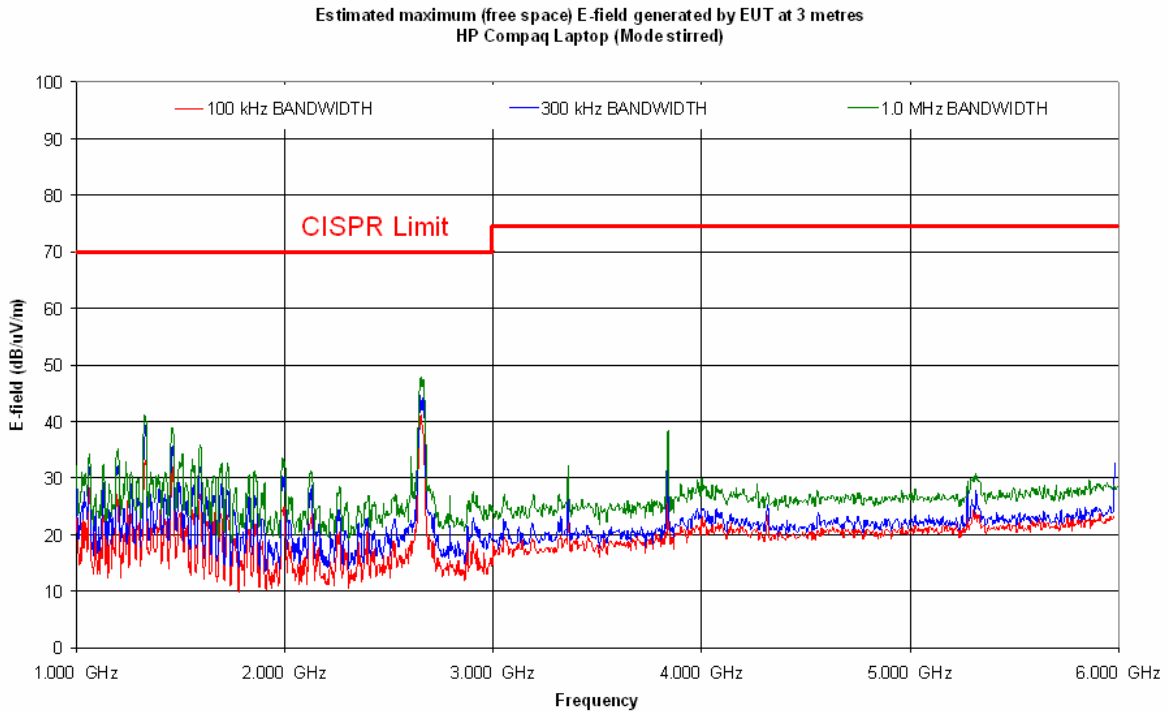


Figure 18: Laptop – Mode Stirred

#### 4.6 Comparison of FAR and Reverberation Measurements

Figure 19 shows the comparison between the radiated emissions from the desktop PC measured in the reverberation chamber compared with those measured on the same item of equipment in the Fully Anechoic Room.


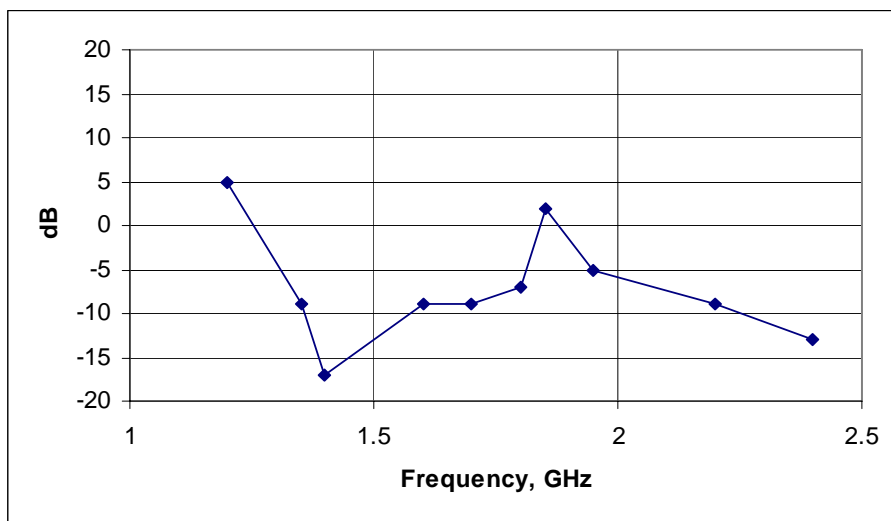


Figure 19: Desktop PC reverberation chamber radiated emission results relative to FAR results

The reverberation chamber gave an average reduction in field of 7 dB but there was clear and apparently uniform frequency dependence. This difference is due to fundamental differences in the methods, with the FAR giving a direct measure of field strength, whereas the reverberation chamber requires a calculation from a total received power which includes multiple reflections off the chamber walls. This difference could lead to a factor, which could be included in EN 61000-4-21 to obtain representative fields when using the reverberation chamber, but further work is required to determine the value and precision of the gain figure to be applied. The same outline analysis was performed for the DVD/TV system that was measured using both facilities. The results are presented in Figure 20. The mean value is again in the order of about 10 dB with a +/-5 dB variation about the mean.

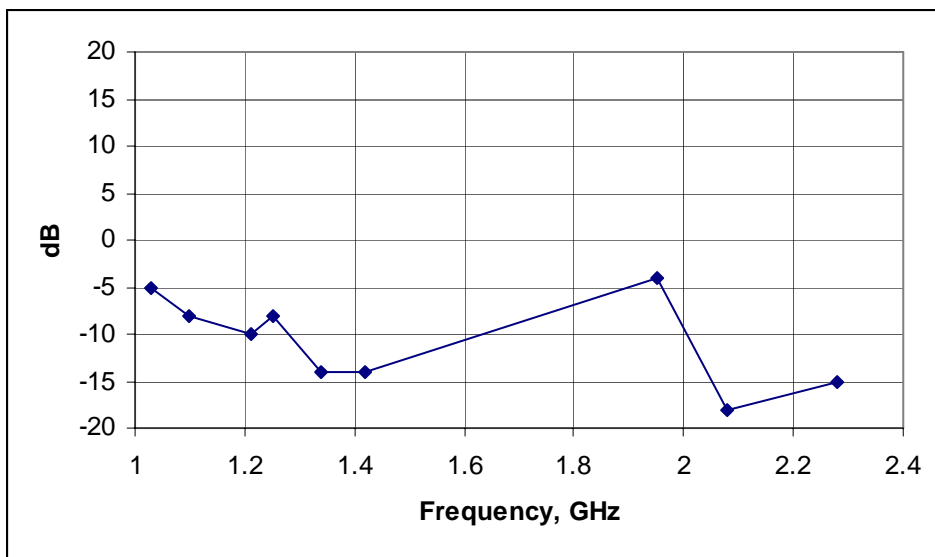


**Figure 20: DVD/TV reverberation chamber radiated emission results relative to FAR results**

Both of these results imply that the reverberation chamber directivity factor of 1.7 would probably need to be adjusted in order to realise a more representative reverberation chamber result closer in value to those determined in the FAR for these types of product. It is encouraging that the differences do not vary significantly with frequency since this could be an expected effect where the EUT are omni-directional radiators at low frequencies but have higher gain lobes at higher frequencies.

#### **4.7 Extraction of Measurement Data for Input to the Modelling**


The anechoic measurement results were used to provide an input to modelling work, as the results available were more extensive than the reverberation chamber results and use a CISPR accepted methodology. The full list of extracted data is shown in Tables 9 and 10. An investigation of the types of emissions from the different products showed that there are typically two types of signal emitted from electronic / radio equipment: wideband signals, e.g. from dithered clocks, and narrowband

harmonic signals. Figure 21 illustrates example field strength measurements from a desktop PC from 1 to 1.5 GHz.

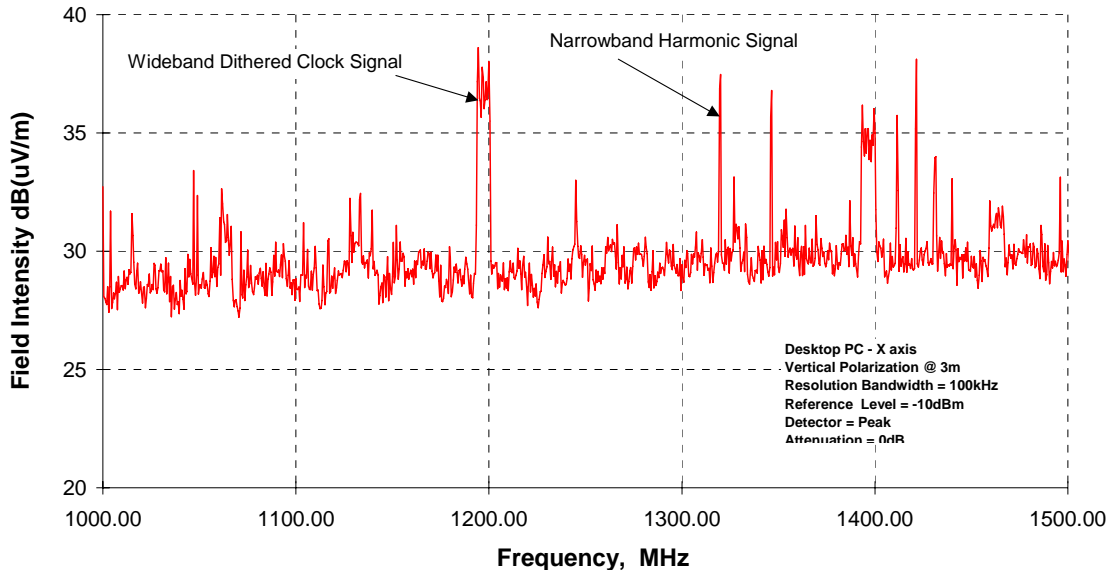


**Figure 21: EMC Measurements from a Desktop PC**

An Excel module was developed which automatically processed the measured data according to a set of functions. Firstly, only those emissions that were 2 dB or greater above the noise floor were extracted. The data then contained both narrowband and broadband emissions and these needed to be first identified and then separated. Figure 22 show this process for the DVD+TV combination for frequencies from 1 to 2 GHz. This process worked very well in the majority of cases and gave quite reliable data for the modelling.

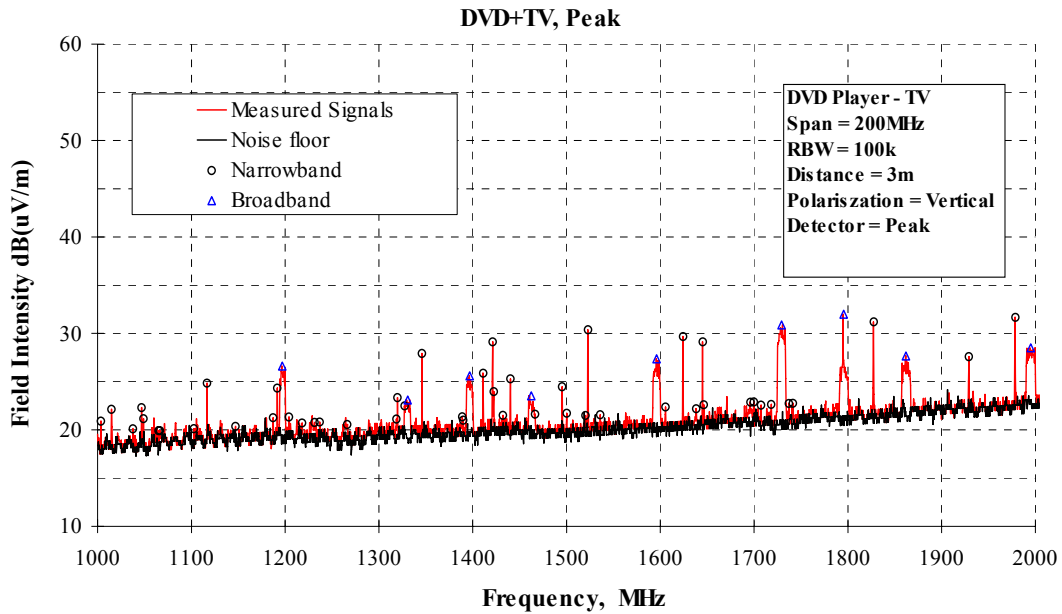

**Figure 22: Automatic extractions of narrowband and broadband data, DVD+TV, 1 to 2 GHz**

The separated narrowband and broadband emissions data was then further processed to provide statistical information. Figure 23 shows processed narrowband data in the form of the percentage of the sampled data versus the emission level, and also the number of occurrences, for 3 frequency bands.

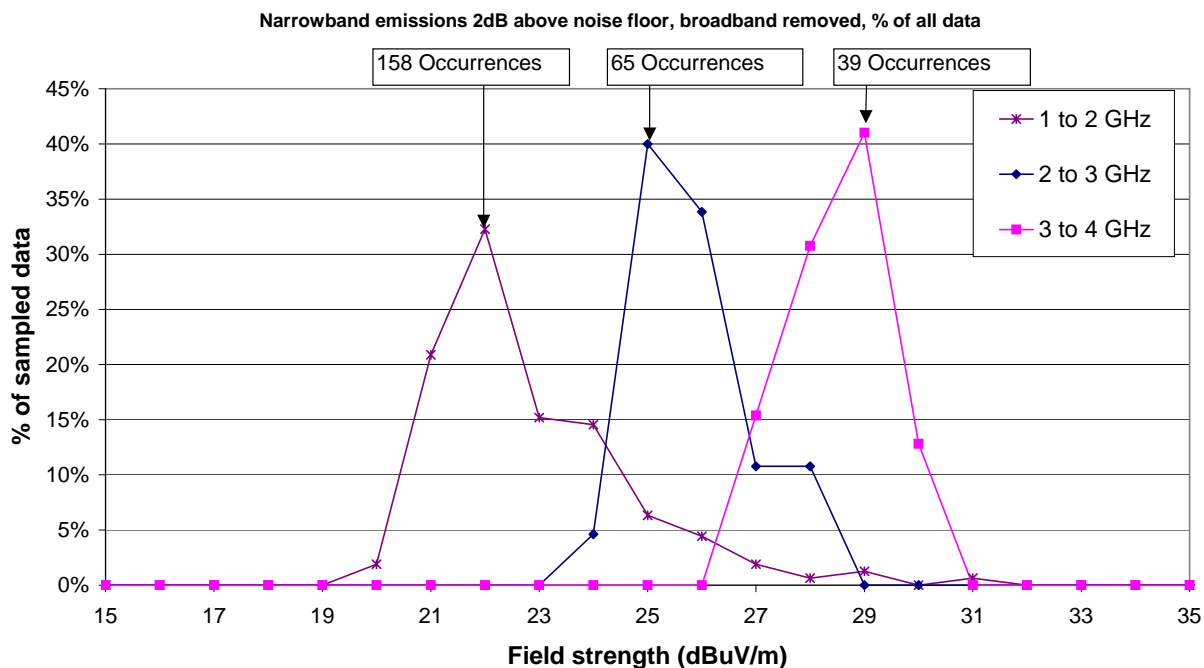

**Figure 23: Extracted narrowband statistics (% of sampled data plus number of occurrences)**

It should be noted that above about 2 to 3 GHz the emissions were largely below the noise floor. For this reason, where the noise floor dominated the emissions, the actual measured levels were used but some statistical information such as number of occurrences was used from lower frequency bands. The assumption is that the probability of occurrence of narrowband and broadband emissions is similar at higher frequencies but the levels are lower. If anything, this is a slightly worst-case as it also assumes that some of the emissions are at the noise floor level whereas they could be considerably below.

In addition, the following information was used. At each frequency where an emission is detected, the maximum field strength and the field strength variation with the orientation of the measured equipment have been determined.

In addition to the field strength levels and the number of occurrences, the bandwidths were also determined. Tables 9 and 10 summarises the measured emission characteristics for all equipment considered in this study. The results are obtained from an average detector with 100 kHz resolution bandwidth.

**Table 9: Measured Emission Characteristics**

Equipment	Frequency Band	Emission Type	Mean of Measured Maximum Emission Levels (dB $\mu$ V/m)	Standard Deviation of Measured Maximum Emission Levels (dB)	Difference Between Maximum and Mean of Measured Emission Variation with Orientation (dB)	Standard Deviation of Measured Emission Variation with Orientation (dB)	Number of Occurrence	Mean Emission Bandwidth (MHz)
Laptop	1 – 2 GHz	Narrowband	22	3.44	-4	2.3	225	0.69
		Wideband	28	0.53	-4	2.3	14	10.61
	2 – 3 GHz	Narrowband	26	2.14	-9	3.0	71	0.46
		Wideband	32	0.53	-9	3.0	2	15.9
	3 – 4 GHz	Narrowband	29	0.80	-9	3.0	74	0.4
		Wideband	32	0.53	-9	3.0	2	15.9
PC	1 – 2 GHz	Narrowband	23	1.93	-9	3.5	48	0.52
		Wideband	28	1.71	-9	3.5	9	7.0
	2 – 3 GHz	Narrowband	26	1.35	-8	4.2	22	0.53
		Wideband	29	1.85	-8	4.2	2	7.8
	3 – 4 GHz	Narrowband	28	0.96	-8	4.2	9	0.48
		Wideband	29	1.85	-8	4.2	2	7.8
TV+DVD	1 – 2 GHz	Narrowband	22	2.27	-8	5.3	158	0.57
		Wideband	31	2.27	-8	5.3	28	3.49
	2 – 3 GHz	Narrowband	25	0.88	-8	3.0	65	0.46
		Wideband	30	0.94	-8	3.0	8	2.95
	3 – 4 GHz	Narrowband	29	0.84	-8	3.0	39	0.42
		Wideband	30	0.94	-8	3.0	8	2.95

Table 10: Measured Emission Characteristics (continued)

Equipment	Frequency Band	Emission Type	Mean of Measured Maximum Emission Levels (dB $\mu$ V/m)	Standard Deviation of Measured Maximum Emission Levels (dB)	Difference Between Maximum and Mean of Measured Emission Variation with Orientation (dB)	Standard Deviation of Measured Emission Variation with Orientation (dB)	Number of Occurrence	Mean Emission Bandwidth (MHz)
X-Box	1 – 2 GHz	Narrowband	25	2.27	-7	3.6	63	0.84
		Wideband	33	5.16	-7	3.6	3	3.7
	2 – 3 GHz	Narrowband	26	1.46	-6	2.2	32	0.76
		Wideband	33	2.24	-6	2.2	2	18.64
	3 – 4 GHz	Narrowband	29	0.87	-6	2.2	17	0.59
		Wideband	33	2.24	-6	2.2	2	18.64
WML	1 – 2 GHz	Narrowband	22	3.44	-10	4.1	67	0.96
		Wideband	35	0.53	-10	4.1	2	3.47
	2 – 3 GHz	Narrowband	28	2.15	-7	3.3	14	1.25
		Wideband	35	0.53	-7	3.3	2	3.47
	3 – 4 GHz	Narrowband	28	0.8	-7	3.3	2	0.4
		Wideband	35	0.53	-7	3.3	2	3.47

## 4.8 Spurious Emission Measurements in FAR

Spurious emission measurements were made to identify if the actual measured values were significantly below the ETSI limits or whether they tended to radiate up to the limits. Three products were tested:

- DECT phone
- 802.11b/g wireless router
- Three GSM mobile phones (Nokia 6310i, Motorola V3, Nokia 1100)

The resulting field strengths and effective EIRPs are compared to the allowable spurious emission limits in Table 11. The measured spurious emissions were between 3 and 12 dB below the limits.

**Table 11:**  
**DECT spurious emission levels**

Harmonic Frequencies, GHz	Equivalent measured EIRP, dBm	Equivalent allowable EIRP, dBm
DECT		
3.76	-36.62	-30.00 <sup>1</sup>
Wireless Router (Wi-Fi)		
4.91	-42.15	-30.00 <sup>2</sup>
GSM900		
1789.97 <sup>3</sup>	-33.74	-30.00 <sup>6</sup>
1789.97 <sup>4</sup>	-33.19	-30.00 <sup>6</sup>
1789.97 <sup>5</sup>	-35.13	-30.00 <sup>6</sup>

<sup>1</sup> ETSI 300 176-1; <sup>2</sup> ETSI 300 328; <sup>3</sup> Nokia 6310i; <sup>4</sup> Motorola V3; <sup>5</sup> Nokia 1100